



<http://www.ebiz-tcf.eu>

DRAFT

IMPLEMENTATION GUIDE

TRANSACTION "TEXTILE CATALOGUE"

Version: draft

Date of release: 17/5/2019

Document code: G009

technical Documentation: <http://www.ebiz.enea.it>

XML Schemas repository: <http://www.ebiz.enea.it/moda-ml/repository/schema/draft/default.asp>

Guides repository: <http://www.ebiz.enea.it/moda-ml/repository/guide/draft/default.asp>

Guide filename: G009-eBIZ-TextileCatalogue.pdf

0. PREMISE

This document contains a proposal for the updating and extension of eBIZ specifications starting from the eBIZ version released as CEN CWA 16667 in 2013. Under the name of 'Draft version' it is reported the result of an extensive work of analysis and consultation aimed at developing and maintaining eBIZ specifications.

In particular, the content of this proposal is the result of various activities, mainly those carried out within the framework of the **eBIZ 4.0 project** funded by the European Commission, call COS-DESIGN-2015-3-06, topic COS-2015-DESIGN-2.

The technical contents are backwards compatible with the latest official published version.

1. BUSINESS DESCRIPTION

1.1 Scope

The present guide has been issued to assist the companies of the Textile-Clothing sector in the implementation of the standard XML document type "Textile CATALOGUE", providing all the instruction required for its use in any context of e-commerce between Apparel Producers and Fabric Producers. All the rules required for the construction and validation of the document are embedded into the specific XML-Schema, which is detailed in section "Implementation guide".


1.2 Generalities

This document is usable less for a sales catalogue than to exchange in advance the product data between the Supplier and the Customer, in order to synchronize their product data-bases.

It lists the articles composing the Fabric Producer's offer (codes, descriptions, prices and sales conditions) and can include some of the technical data (composition, weight and width, construction specifications, . . .).

1.3. Possible scenario

Selection of fabric

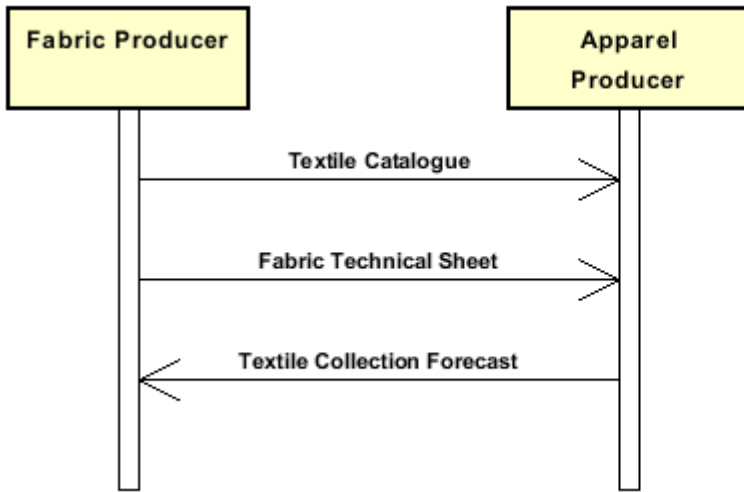

2. IMPLEMENTATION GUIDE

2.1 General structure of XML document

All the business data that can be exchanged through this class of documents are shown in the following "document structure", that provides a simplified vision of the Schema.

In particular:

- the two numbers following each element define its "cardinality" (minimum and maximum number of occurrences); the minimum equal zero indicates that the element is optional, the minimum greater than zero indicates that is mandatory;
- the bold character denotes the complex elements (aggregates of simple elements) that were built for the sake of functionality and re-usability of some complex informations sets. The child elements in each parent element are easily spotted as "indented";
- the symbol "@" denotes an attribute of the preceding element; here "the usage indicator (optional, required, ...)" is shown in square brackets.

Structure

TEXCatalog

@msgfunction [Optional] [Default= OR]

@version [Optional] [Default= draft]

@useProfile [Optional]

| **TCHheader 1-1**

| | msgN 1-1

| | - choose -

| | msgID 0-1

| | - or -

| | docID 0-1

| | *@numberingOrg [Optional]*

| | - end choose -

| | msgDate 1-1

| | *@dateForm [Optional]*

| | msgCurrency 0-1

| | **refDoc 0-9**

| | *@docType [Required]*

| | | docID 1-2

| | | *@numberingOrg [Optional]*

| | | docDate 0-1

| | | *@dateForm [Optional]*

| | | season 0-1

| | | *@numberingOrg [Optional]*

| | | *@codeList [Optional]*

| | | *@listName [Optional]*

| | | *@listVersion [Optional]*

| | | itemID 0-1

| | | **attachment 0-1**

| | | *@uid [Optional]*

| | | | fileName 0-1

| | | | *@numberingOrg [Optional]*

| | | | binaryObject 0-1

| | | | *@format [Optional]*

| | | | *@mime [Optional]*

| | | | *@encoding [Optional]*

| | | | *@characterSet [Optional]*

| | | | **externalReference 0-99**

| | | | | uri 1-1

| | | | | *@isURL [Optional] [Default= true]*

| | | | | mimeTypeCode 0-1

| | | | | formatCode 0-1

- | | | encodingCode 0-1
- | | | characterSetCode 0-1
- | **picture 0-9**
 - | pictureCode 0-1
 - | title 0-unbounded
 - | | *@In [Optional]*
 - | description 0-unbounded
 - | | *@In [Optional]*
 - | validityStart 0-1
 - | | *@dateForm [Optional]*
 - | validityEnd 0-1
 - | | *@dateForm [Optional]*
 - | alternativeText 0-unbounded
 - | | *@In [Optional]*
 - | rendering 0-1
 - | resolution 0-1
 - | | *@resolutionType [Optional] [Default= dpi]*
 - | width 0-1
 - | | *@um [Required]*
 - | height 0-1
 - | | *@um [Required]*
 - | nominalWidth 0-2
 - | | *@um [Optional]*
 - | nominalHeight 0-2
 - | | *@um [Optional]*
 - | pictureUse 0-1
 - | pictureQualifier 0-1
 - | **attachment 1-1**
 - | | *@uid [Optional]*
 - | | fileName 0-1
 - | | | *@numberingOrg [Optional]*
 - | | binaryObject 0-1
 - | | | *@format [Optional]*
 - | | | *@mime [Optional]*
 - | | | *@encoding [Optional]*
 - | | | *@characterSet [Optional]*
 - | | **externalReference 0-99**
 - | | | uri 1-1
 - | | | | *@isURL [Optional] [Default= true]*
 - | | | mimeTypeCode 0-1
 - | | | formatCode 0-1
 - | | | encodingCode 0-1
 - | | | characterSetCode 0-1
 - | note 0-99
 - | | *@numberingOrg [Optional]*
 - | | *@codeList [Optional]*
 - | | *@noteLabel [Optional]*
- | season 0-1
- | | *@numberingOrg [Optional]*
- | | *@codeList [Optional]*
- | | *@listName [Optional]*
- | | *@listVersion [Optional]*
- | validityStart 0-1
- | | *@dateForm [Optional]*
- | validityEnd 0-1
- | | *@dateForm [Optional]*
- | **buyer 0-1**
- | | *@logo [Optional]*
- | | *@sender [Optional]*
 - | | | id 1-1
 - | | | | *@numberingOrg [Optional]*

- | | additionalIdentifier 0-9
- | | @numberingOrg [Optional]
- | | @idQualifier [Optional]
- | | legalName 0-1
- | | dept 0-1
- | | subDept 0-1
- | | person 0-1
- | | @email [Optional]
- | | @phone [Optional]
- | | @fax [Optional]
- | | street 0-1
- | | city 0-1
- | | subCountry 0-1
- | | country 0-1
- | | postCode 0-1
- | | **supplier 1-1**
- | | @logo [Optional]
- | | @sender [Optional]
- | | id 1-1
- | | @numberingOrg [Optional]
- | | additionalIdentifier 0-9
- | | @numberingOrg [Optional]
- | | @idQualifier [Optional]
- | | legalName 0-1
- | | dept 0-1
- | | subDept 0-1
- | | person 0-1
- | | @email [Optional]
- | | @phone [Optional]
- | | @fax [Optional]
- | | street 0-1
- | | city 0-1
- | | subCountry 0-1
- | | country 0-1
- | | postCode 0-1
- | | **thirdParty 0-5**
- | | @VAT [Optional]
- | | @role [Required]
- | | @sender [Optional]
- | | id 1-1
- | | @numberingOrg [Optional]
- | | legalName 0-1
- | | dept 0-1
- | | subDept 0-1
- | | person 0-1
- | | @email [Optional]
- | | @phone [Optional]
- | | @fax [Optional]
- | | street 0-1
- | | city 0-1
- | | subCountry 0-1
- | | country 0-1
- | | postCode 0-1
- | | note 0-99
- | | @numberingOrg [Optional]
- | | @codeList [Optional]
- | | @noteLabel [Optional]

| **terms 0-1**

- | | **payment 0-5**
- | | @finDiscount [Optional]

| | *@finSurcharge [Optional]*
 | | - choose -
 | | | payTerm 1-1
 | | - or -
 | | | payTermText 1-1
 | | - end choose -
 | | | payMode 0-1
 | | **insPayment 0-5**
 | | *@part [Required]*
 | | - choose -
 | | | payTerm 1-1
 | | - or -
 | | | payTermText 1-1
 | | - end choose -
 | | | payMode 0-1
 | | **trade 0-1**
 | | - choose -
 | | | incoTermText 1-1
 | | - or -
 | | | incoTerm 1-1
 | | - end choose -
 | | | location 0-1
 | | | *@LRI [Optional]*
 | | **transInfo 0-5**
 | | *@transReason [Optional]*
 | | *@progr [Optional]*
 | | | transMode 1-1
 | | | carrier 0-1
 | | | deliveryPlace 0-1
 | | | grossWeight 0-1
 | | | *@um [Required]*
 | | | netWeight 0-1
 | | | *@um [Required]*
 | | | transMeans 0-1
 | | | transCondition 0-3
 | | | transConditionText 0-1
 | | | despatchPlace 0-1
 | | | despatchDate 0-1
 | | | *@dateForm [Optional]*
 | | | delEffectiveDate 0-1
 | | | *@dateForm [Optional]*
 | | **allowanceCharge 0-9**
 | | *@um [Optional]*
 | | *@VAT [Optional]*
 | | *@minQty [Optional]*
 | | *@currency [Optional]*
 | | *@maxQty [Optional]*
 | | - choose -
 | | | AC_category 1-1
 | | - or -
 | | | AC_categoryText 1-1
 | | - end choose -
 | | - choose -
 | | | AC_percent 1-1
 | | - or -
 | | | AC_amount 1-1
 | | - end choose -
 | | **dtScheme 0-1**
 | | | *@taxType [Required]*
 | | | | taxCategory 0-1
 | | | | taxRate 0-1

```

| | | | legalRef 0-1
| | | | @codeList [Required]
| | | | note 0-99
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @noteLabel [Optional]

```

texComInfo 0-1

```

| @endUse [Optional] [Default= PR]
| @IC [Optional]
| @techSheet [Optional]
| | season 0-1
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]
| | brand 0-1
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]
| | productLine 0-1
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]
| | project 0-1
| | operationalCode 0-19
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]
| | | @codeQualifier [Optional]
| | deliveryDate 0-1
| | | @dateForm [Optional]
| | specDate 0-1
| | | @dateForm [Optional]
| | fabricWidth 0-1
| | | @um [Optional] [Default= CMT]
| | pieceLength 0-1
| | | @um [Optional] [Default= MTR]
| | piecePack 0-1
| | - choose -
| | | piecePackText 1-1
| | - or -
| | | pieceInnWrap1 1-1
| | | pieceInnWrap2 0-1
| | | pieceOutWrap 0-1
| | - end choose -
| | note 0-99
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @noteLabel [Optional]

```

TCbody 1-1

```

| | TCgroup 1-unbounded
| | | artGroup 0-1
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]

```


| artGroupName 0-1
 | description 0-unbounded
 | @In [Optional]
 | extendedDescription 0-unbounded
 | @In [Optional]
 | **refDoc 0-9**
 | @docType [Required]
 | | docID 1-2
 | | @numberingOrg [Optional]
 | | docDate 0-1
 | | @dateForm [Optional]
 | | season 0-1
 | | @numberingOrg [Optional]
 | | @codeList [Optional]
 | | @listName [Optional]
 | | @listVersion [Optional]
 | | itemID 0-1
 | | **attachment 0-1**
 | | @uid [Optional]
 | | | fileName 0-1
 | | | @numberingOrg [Optional]
 | | | binaryObject 0-1
 | | | @format [Optional]
 | | | @mime [Optional]
 | | | @encoding [Optional]
 | | | @characterSet [Optional]
 | | | **externalReference 0-99**
 | | | uri 1-1
 | | | | @isURL [Optional] [Default= true]
 | | | | mimeTypeCode 0-1
 | | | | formatCode 0-1
 | | | | encodingCode 0-1
 | | | | characterSetCode 0-1
 | **picture 0-99**
 | pictureCode 0-1
 | title 0-unbounded
 | @In [Optional]
 | description 0-unbounded
 | @In [Optional]
 | validityStart 0-1
 | @dateForm [Optional]
 | validityEnd 0-1
 | @dateForm [Optional]
 | alternativeText 0-unbounded
 | @In [Optional]
 | rendering 0-1
 | resolution 0-1
 | @resolutionType [Optional] [Default= dpi]
 | width 0-1
 | @um [Required]
 | height 0-1
 | @um [Required]
 | nominalWidth 0-2
 | @um [Optional]
 | nominalHeight 0-2
 | @um [Optional]
 | pictureUse 0-1
 | pictureQualifier 0-1
 | | **attachment 1-1**
 | | @uid [Optional]
 | | | fileName 0-1

```

| | | | @numberingOrg [Optional]
| | | | binaryObject 0-1
| | | | @format [Optional]
| | | | @mime [Optional]
| | | | @encoding [Optional]
| | | | @characterSet [Optional]
| | | | externalReference 0-99
| | | | | uri 1-1
| | | | | @isURL [Optional] [Default= true]
| | | | | mimeTypeCode 0-1
| | | | | formatCode 0-1
| | | | | encodingCode 0-1
| | | | | characterSetCode 0-1
| | | | note 0-99
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @noteLabel [Optional]
| | | | allowanceCharge 0-9
| | | | @um [Optional]
| | | | @VAT [Optional]
| | | | @minQty [Optional]
| | | | @currency [Optional]
| | | | @maxQty [Optional]
| | | | - choose -
| | | | | AC_category 1-1
| | | | - or -
| | | | | AC_categoryText 1-1
| | | | - end choose -
| | | | - choose -
| | | | | AC_percent 1-1
| | | | - or -
| | | | | AC_amount 1-1
| | | | - end choose -
| | | | dtScheme 0-1
| | | | @taxType [Required]
| | | | | taxCategory 0-1
| | | | | taxRate 0-1
| | | | | legalRef 0-1
| | | | | @codeList [Required]
| | | | | note 0-99
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @noteLabel [Optional]
| | | | texComInfo 0-1
| | | | @endUse [Optional] [Default= PR]
| | | | @IC [Optional]
| | | | @techSheet [Optional]
| | | | | season 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | brand 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | productLine 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]

```

```

| | | | @listVersion [Optional]
| | | | project 0-1
| | | | operationalCode 0-19
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | @codeQualifier [Optional]
| | | | deliveryDate 0-1
| | | | @dateForm [Optional]
| | | | specDate 0-1
| | | | @dateForm [Optional]
| | | | fabricWidth 0-1
| | | | @um [Optional] [Default= CMT]
| | | | pieceLength 0-1
| | | | @um [Optional] [Default= MTR]
| | | | piecePack 0-1
| | | | - choose -
| | | | | piecePackText 1-1
| | | | - or -
| | | | | pieceInnWrap1 1-1
| | | | | pieceInnWrap2 0-1
| | | | | pieceOutWrap 0-1
| | | | - end choose -
| | | | note 0-99
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @noteLabel [Optional]
| | | | TCitem 0-unbounded
| | | | lineN 0-1
| | | | @VAT [Optional]
| | | | refDoc 0-9
| | | | @docType [Required]
| | | | | docID 1-2
| | | | | @numberingOrg [Optional]
| | | | | docDate 0-1
| | | | | @dateForm [Optional]
| | | | | season 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | itemID 0-1
| | | | | attachment 0-1
| | | | | @uid [Optional]
| | | | | | fileName 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | binaryObject 0-1
| | | | | | @format [Optional]
| | | | | | @mime [Optional]
| | | | | | @encoding [Optional]
| | | | | | @characterSet [Optional]
| | | | | | externalReference 0-99
| | | | | | | uri 1-1
| | | | | | | @isURL [Optional] [Default= true]
| | | | | | | mimeTypeCode 0-1
| | | | | | | formatCode 0-1
| | | | | | | encodingCode 0-1
| | | | | | | characterSetCode 0-1
| | | | | picture 0-99
| | | | | pictureCode 0-1

```

| title 0-unbounded
 | @In [Optional]
 | description 0-unbounded
 | @In [Optional]
 | validityStart 0-1
 | @dateForm [Optional]
 | validityEnd 0-1
 | @dateForm [Optional]
 | alternativeText 0-unbounded
 | @In [Optional]
 | rendering 0-1
 | resolution 0-1
 | @resolutionType [Optional] [Default= dpi]
 | width 0-1
 | @um [Required]
 | height 0-1
 | @um [Required]
 | nominalWidth 0-2
 | @um [Optional]
 | nominalHeight 0-2
 | @um [Optional]
 | pictureUse 0-1
 | pictureQualifier 0-1
 | **attachment 1-1**
 | @uid [Optional]
 | | fileName 0-1
 | | @numberingOrg [Optional]
 | | binaryObject 0-1
 | | @format [Optional]
 | | @mime [Optional]
 | | @encoding [Optional]
 | | @characterSet [Optional]
 | | **externalReference 0-99**
 | | | uri 1-1
 | | | @isURL [Optional] [Default= true]
 | | | mimeTypeCode 0-1
 | | | formatCode 0-1
 | | | encodingCode 0-1
 | | | characterSetCode 0-1
 | note 0-99
 | @numberingOrg [Optional]
 | @codeList [Optional]
 | @noteLabel [Optional]
 fabricNameSupplier 0-1
 fabricNameBuyer 0-1
 art 0-1
 @numberingOrg [Optional]
 @codeList [Optional]
 @listName [Optional]
 @listVersion [Optional]
 pattern 0-unbounded
 @numberingOrg [Optional]
 @codeList [Optional]
 @listName [Optional]
 @listVersion [Optional]
 color 0-unbounded
 @numberingOrg [Optional]
 @codeList [Optional]
 @listName [Optional]
 @listVersion [Optional]
 added 0-unbounded

```

| | | | @numberingOrg [Optional]
| | | | @addType [Optional]
| | | | description 0-unbounded
| | | | @ln [Optional]
| | | | extendedDescription 0-unbounded
| | | | @ln [Optional]
| | | | - choose -
| | | | | marketPrice 0-unbounded
| | | | | | catalogPrice 1-1
| | | | | | @um [Required]
| | | | | | @minQty [Optional]
| | | | | | @currency [Optional]
| | | | | | @garmentMarket [Optional]
| | | | | | @maxQty [Optional]
| | | | | | allowanceCharge 0-9
| | | | | | @um [Optional]
| | | | | | @VAT [Optional]
| | | | | | @minQty [Optional]
| | | | | | @currency [Optional]
| | | | | | @maxQty [Optional]
| | | | | - choose -
| | | | | | AC_category 1-1
| | | | | - or -
| | | | | | AC_categoryText 1-1
| | | | | - end choose -
| | | | | - choose -
| | | | | | AC_percent 1-1
| | | | | - or -
| | | | | | AC_amount 1-1
| | | | | - end choose -
| | | | | | dtScheme 0-1
| | | | | | @taxType [Required]
| | | | | | | taxCategory 0-1
| | | | | | | taxRate 0-1
| | | | | | | legalRef 0-1
| | | | | | | @codeList [Required]
| | | | | | | note 0-99
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @noteLabel [Optional]
| | | | | | geographicArea 0-9
| | | | | | - choose -
| | | | | | | geographicAreaCode 1-1
| | | | | | | - or -
| | | | | | | geographicAreaText 1-1
| | | | | | | - end choose -
| | | | | - or -
| | | | | | catalogPrice 0-99
| | | | | | @um [Required]
| | | | | | @minQty [Optional]
| | | | | | @currency [Optional]
| | | | | | @garmentMarket [Optional]
| | | | | | @maxQty [Optional]
| | | | | - end choose -
| | | | | | allowanceCharge 0-9
| | | | | | @um [Optional]
| | | | | | @VAT [Optional]
| | | | | | @minQty [Optional]
| | | | | | @currency [Optional]
| | | | | | @maxQty [Optional]
| | | | | - choose -

```

```

| | | | AC_category 1-1
| | | | - or -
| | | | AC_categoryText 1-1
| | | | - end choose -
| | | | - choose -
| | | | AC_percent 1-1
| | | | - or -
| | | | AC_amount 1-1
| | | | - end choose -
| | | | dtScheme 0-1
| | | | | @taxType [Required]
| | | | | | taxCategory 0-1
| | | | | | taxRate 0-1
| | | | | | legalRef 0-1
| | | | | | @codeList [Required]
| | | | | | note 0-99
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @noteLabel [Optional]
| | | | generalChar 0-1
| | | | | fabricNameSupplier 0-1
| | | | | fabricNameBuyer 0-1
| | | | | season 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | tradeMark 0-1
| | | | | customsStat 0-1
| | | | | fabricCompos 1-1
| | | | | | percCompos 1-9
| | | | | | | @fibre [Required]
| | | | | dyeProcess 0-1
| | | | | dyeStuff 0-1
| | | | | careLabel 0-1
| | | | | minLot 0-1
| | | | | | @um [Required]
| | | | | minLotExclusive 0-1
| | | | | | @um [Required]
| | | | | avgDeliveryDD 0-1
| | | | | estFaultiness 0-1
| | | | | note 0-99
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @noteLabel [Optional]
| | | | | construction 0-1
| | | | | fabricWeightM 1-1
| | | | | | @um [Optional] [Default= GRM]
| | | | | fabricWeightM2 0-1
| | | | | | @um [Optional] [Default= GRM]
| | | | | fabricWidth 0-1
| | | | | | @um [Optional] [Default= CMT]
| | | | | fabricCutWidth 0-1
| | | | | | @um [Optional] [Default= CMT]
| | | | | pieceLength 0-1
| | | | | | @um [Optional] [Default= MTR]
| | | | | weave 0-1
| | | | | warpCount 0-9
| | | | | | @method [Optional] [Default= ISO-2060]
| | | | | | @fibre [Optional]
| | | | | weftCount 0-9

```

| @method [Optional] [Default= ISO-2060]
 | @fibre [Optional]
 | warpEndsN 0-1
 | weftEndsN 0-1
 | bowingWarp 0-1
 | @method [Optional]
 | bowingWeft 0-1
 | @method [Optional]
 | checksFlaw 0-1
 | @method [Optional]
 | weftDev 0-1
 | @method [Optional]
 | resin 0-1

texComInfo 0-1

@endUse [Optional] [Default= PR]

@IC [Optional]

@techSheet [Optional]

| season 0-1

| @numberingOrg [Optional]

| @codeList [Optional]

| @listName [Optional]

| @listVersion [Optional]

| brand 0-1

| @numberingOrg [Optional]

| @codeList [Optional]

| @listName [Optional]

| @listVersion [Optional]

| productLine 0-1

| @numberingOrg [Optional]

| @codeList [Optional]

| @listName [Optional]

| @listVersion [Optional]

| project 0-1

| operationalCode 0-19

| @numberingOrg [Optional]

| @codeList [Optional]

| @listName [Optional]

| @listVersion [Optional]

| @codeQualifier [Optional]

| deliveryDate 0-1

| @dateForm [Optional]

| specDate 0-1

| @dateForm [Optional]

| fabricWidth 0-1

| @um [Optional] [Default= CMT]

| pieceLength 0-1

| @um [Optional] [Default= MTR]

piecePack 0-1

- choose -

| | piecePackText 1-1

- or -

| | pieceInnWrap1 1-1

| | pieceInnWrap2 0-1

| | pieceOutWrap 0-1

- end choose -

| note 0-99

| @numberingOrg [Optional]

| @codeList [Optional]

| @noteLabel [Optional]

dtScheme 0-1

@taxType [Required]

				taxCategory 0-1
				taxRate 0-1
				legalRef 0-1
				@codeList [Required]
				note 0-99
				@numberingOrg [Optional]
				@codeList [Optional]
				@noteLabel [Optional]
				note 0-99
				@numberingOrg [Optional]
				@codeList [Optional]
				@noteLabel [Optional]
				note 0-99
				@numberingOrg [Optional]
				@codeList [Optional]
				@noteLabel [Optional]

2.2 Detailed description of document elements

Following tables show all elements (complex and simple) used in this document. Description includes: 1) element's information: xml tag, name, brief description, data type and syntax constraints; 2) information about use of the element in a particular position in the document: xpath and possible associated notes.

2.2.1 Complex elements (Aggregate Business Information Entities)

Complex elements are those elements whose content is composed of other elements (childs). Complex elements are alphabetically ordered.

allowanceCharge	<p>Allowances and Charges related to an Order or a contract (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge) 0-9 - note: <i>Allowances and charges to be applied to the price</i> (XPath TEXCatalog/TCbody/TCgroup/allowanceCharge) 0-9 - note: <i>It declares conditions applicable to all the group</i> (XPath TEXCatalog/terms/allowanceCharge) 0-9 (XPath TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge) 0-9 - note: <i>Charges and discounts to be applied to all the prices for this item</i></p>
attachment	<p>an attached document. An attachment can refer to an external document or be included with the document being exchanged (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment) 1-1 (XPath TEXCatalog/THeader/picture/attachment) 1-1 (XPath TEXCatalog/THeader/refDoc/attachment) 0-1 (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/attachment) 1-1</p>
buyer	<p>details of the Buyer (party that buys the good or service that is object of the current collaborative process) - base type: Nad, (XPath TEXCatalog/THeader/buyer) 0-1</p>
construction	<p>construction data and features included in the technical sheet of the fabric article (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction) 0-1</p>
dtScheme	<p>set of data usable to declare the duty or tax applied (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/dtScheme) 0-1 - note: <i>recommended alternative to the attribute @VAT</i> (XPath TEXCatalog/terms/allowanceCharge/dtScheme) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme) 0-1 (XPath TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme) 0-1</p>
externalReference	<p>details about an external object, such as a document stored at a remote location (XPath TEXCatalog/THeader/refDoc/attachment/externalReference) 0-99 (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference) 0-99 (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference) 0-99 (XPath TEXCatalog/THeader/picture/attachment/externalReference) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference) 0-99</p>
fabricCompos	<p>composition of the fabric according to the Directory 97/37/CE (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/fabricCompos) 1-1</p>
generalChar	<p>general data included in the technical sheet of the fabric article (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar) 0-1</p>

geographicArea	identification of a geographic area - base type: string, (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/geographicArea) 0-9 - note: <i>geographical area to which the indicated price applies (one or more)</i>
insPayment	payment details for payment by installments (XPath TEXCatalog/terms/insPayment) 0-5 - note: <i>excluded the case of offers, this set of data is alternative to payment set and must be iterated for each payment installment</i>
marketPrice	price shown for a specific market catalogue (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice) 0-unbounded - note: <i>This element allows a deeper detail about the context of application of the price in respect of cataloguePrice.</i>
payment	payment details for payment all in one (XPath TEXCatalog/terms/payment) 0-5 - note: <i>excluded the case of offers, this set of data is alternative to insPayment, it can be iterated to specify alternative terms of payment (e.g.: 60 days or 30 days with 3% discount)</i>
picture	picture; image features and its representation or link to it - base type: , (XPath TEXCatalog/TCbody/TCgroup/picture) 0-99 - note: <i>Images associated to the whole group</i> (XPath TEXCatalog/Tcheader/picture) 0-9 - note: <i>Images associated to the whole catalogue (i.e. cover)</i> (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture) 0-99
piecePack	type of wrapping or packing of the fabric pieces (XPath TEXCatalog/texComInfo/piecePack) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/piecePack) 0-1 (XPath TEXCatalog/TCbody/TCgroup/texComInfo/piecePack) 0-1
refDoc	identification of a document and of an item thereof, to which the message makes reference (XPath TEXCatalog/Tcheader/refDoc) 0-9 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc) 0-9 (XPath TEXCatalog/TCbody/TCgroup/refDoc) 0-9
supplier	details of the Supplier (party that supplies the good or service that is object of the current collaborative process) - base type: Nad, (XPath TEXCatalog/Tcheader/supplier) 1-1
TCbody	body of the document TEXTILES CATALOGUE (XPath TEXCatalog/TCbody) 1-1
TCgroup	articles grouping of the TEXTILES CATALOGUE - base type: , (XPath TEXCatalog/TCbody/TCgroup) 1-unbounded - note: <i>this level is created to allow articles grouping by families</i>
Tcheader	header of the document TEXTILES CATALOGUE (XPath TEXCatalog/Tcheader) 1-1
TCitem	line item of the message TEXTILES CATALOGUE - base type: , (XPath TEXCatalog/TCbody/TCgroup/TCitem) 0-unbounded - note: <i>More articles in the same group of products</i>
terms	details of the commercial obligations for payment and delivery (XPath TEXCatalog/terms) 0-1
texComInfo	miscellaneous trade information, that can be specified in a textile Order, referred either to the whole document or to the single item (XPath TEXCatalog/texComInfo) 0-1

	- note: <i>here must be specified the conditions valid for the whole document</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo</code>) 0-1 - note: <i>It declares conditions applicable to all the group</i>
thirdParty	details of the Third Party, different from Buyer or Supplier - base type: Nad, (XPath <code>TEXCatalog/TCheader/thirdParty</code>) 0-5
trade	general terms of trade for the specified supply (XPath <code>TEXCatalog/terms/trade</code>) 0-1
transInfo	details of transport: mode, carrier and delivery place (XPath <code>TEXCatalog/terms/transInfo</code>) 0-5

2.2.2 Simple elements (Basic Business Information Entities)

Simple elements are those elements whose content is characterized by a data type plus a domain of possible values. Simple elements are alphabetically ordered.

AC_amount	amount of an Allowance or Charge - base type: decimal, fraction digits: 2, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/AC_amount</code>) 1-1 (XPath <code>TEXCatalog/terms/allowanceCharge/AC_amount</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/AC_amount</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/AC_amount</code>) 1-1
AC_category	coded specification of an Allowance or Charge - base type: string, cod. table: T41 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T41.xml (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/AC_category</code>) 1-1 (XPath <code>TEXCatalog/terms/allowanceCharge/AC_category</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/AC_category</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/AC_category</code>) 1-1
AC_categoryText	free text description of an Allowance or Charge - base type: string, max length: 250, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/AC_categoryText</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/AC_categoryText</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/AC_categoryText</code>) 1-1 (XPath <code>TEXCatalog/terms/allowanceCharge/AC_categoryText</code>) 1-1
AC_percent	amount of an Allowance or Charge as a percentage - base type: decimal, max inclusive: 100, fraction digits: 2, (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/AC_percent</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/AC_percent</code>) 1-1 (XPath <code>TEXCatalog/terms/allowanceCharge/AC_percent</code>) 1-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/AC_percent</code>) 1-1
added	additional code of the product (complementing the formers) - base type: string, max length: 80, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/added</code>) 0-unbounded - note: <i>this data can be iterated to show a number of features available for the article</i>
additionalIdentifier	additional identification code of a Party, for example customs registries or others - base type: string, max length: 15, (XPath <code>TEXCatalog/TCheader/supplier/additionalIdentifier</code>) 0-9

	<p>- note: <i>identifiers for example for exports, such as MID (Manufacturer Identification Code), EORI (E.O.R.I. - Economic Operator Registration and Identification)</i> (XPath TEXCatalog/TCheader/buyer/additionalIdentifier) 0-9</p> <p>- note: <i>identifiers for example for exports, such as MID (Manufacturer Identification Code), EORI (E.O.R.I. - Economic Operator Registration and Identification)</i></p>
@addType	<p>qualifier of the additional coding of a product - base type: string, cod. table: T44 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T44.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/added/@addType) [Optional] - nota: <i>addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.</i></p>
alternativeText	<p>alternative text of the picture - base type: string, max length: 255, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/alternativeText) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/TCbody/TCgroup/picture/alternativeText) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/TCheader/picture/alternativeText) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i></p>
art	<p>article number of the product - base type: string, max length: 80, (XPath TEXCatalog/TCbody/TCgroup/TCitem/art) 0-1</p>
artGroup	<p>code identifying a class of products - base type: string, max length: 40, (XPath TEXCatalog/TCbody/TCgroup/artGroup) 0-1</p>
artGroupName	<p>description of a class of products - base type: string, max length: 80, (XPath TEXCatalog/TCbody/TCgroup/artGroupName) 0-1</p>
avgDeliveryDD	<p>average time (workdays) between order receipt and delivery of an article, specified by the Supplier - base type: duration, (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/avgDeliveryDD) 0-1</p>
binaryObject	<p>a binary large object containing an attached document - base type: base64Binary, (XPath TEXCatalog/TCheader/refDoc/attachment/binaryObject) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/binaryObject) 0-1 (XPath TEXCatalog/TCheader/picture/attachment/binaryObject) 0-1 (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/binaryObject) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/binaryObject) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/binaryObject) 0-1</p>
bowingWarp	<p>warp bowing - base type: decimal, min inclusive: 0, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/bowingWarp) 0-1</p>
bowingWeft	<p>weft bowing - base type: decimal, min inclusive: 0, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/bowingWeft) 0-1</p>
brand	<p>A brand name. - base type: string, (XPath TEXCatalog/texComInfo/brand) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/brand) 0-1</p>

	(XPath TEXCatalog/TCbody/TCgroup/texComInfo/brand) 0-1
careLabel	codification of the care instructions printed on the label (ISO 3758) - base type: string, length: 5, (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/careLabel) 0-1 - note: <i>code composition: 1st digit=id.symbol umid washing,2nd=id.s.bleaching,3rd=id.s. ironing,4th=id.s. dry washing,5th=id.s. drying. See ATTACHMENT B.</i>
carrier	identification of the transport carrier - base type: string, max length: 40, (XPath TEXCatalog/terms/transInfo/carrier) 0-1
catalogPrice	price shown in the Supplier's Catalogue - base type: decimal, fraction digits: 2, (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice) 1-1 - note: <i>Unit price not including allowances and charges</i> (XPath TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice) 0-99 - note: <i>this data can be iterated when the price depends on the purchased quantity (see attribute "minQty")</i>
@characterSet	the character set of the binary object if the mime type is text - base type: normalizedString, (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/binaryObject/@characterSet) [Optional] (XPath TEXCatalog/THeader/picture/attachment/binaryObject/@characterSet) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/binaryObject/@characterSet) [Optional] (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/binaryObject/@characterSet) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/binaryObject/@characterSet) [Optional] (XPath TEXCatalog/THeader/refDoc/attachment/binaryObject/@characterSet) [Optional]
characterSetCode	the character set of an external document - base type: normalizedString, (XPath TEXCatalog/THeader/refDoc/attachment/externalReference/characterSetCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/characterSetCode) 0-1 (XPath TEXCatalog/THeader/picture/attachment/externalReference/characterSetCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/characterSetCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/characterSetCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/characterSetCode) 0-1
checksFlaw	flaw in checks - base type: decimal, min inclusive: 0, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/checksFlaw) 0-1
city	name of the city (town, village) - base type: string, max length: 40, (XPath TEXCatalog/THeader/buyer/city) 0-1 (XPath TEXCatalog/THeader/thirdParty/city) 0-1 (XPath TEXCatalog/THeader/supplier/city) 0-1
@codeList	it specifies the URL where the list of codes used to make an instance of the element can be found - base type: string, max length: 255,

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/generalChar/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/texComInfo/season/@codeList`) [Optional]
(XPath `TEXCatalog/texComInfo/productLine/@codeList`) [Optional]
(XPath `TEXCatalog/texComInfo/brand/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/color/@codeList`) [Optional]

- nota: *this attribute could be used as alternative to the others*
(XPath `TEXCatalog/terms/allowanceCharge/dtScheme/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/generalChar/season/@codeList`) [Optional]
(XPath `TEXCatalog/terms/allowanceCharge/dtScheme/legalRef/@codeList`) [Required]

(XPath `TEXCatalog/TCheader/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/legalRef/@codeList`) [Required]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/legalRef/@codeList`) [Required]

(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode/@codeList`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/picture/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/productLine/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/season/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/legalRef/@codeList`) [Required]
(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/brand/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/productLine/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/refDoc/season/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/art/@codeList`) [Optional]

- nota: *this attribute should be ALTERNATIVE to the others*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/picture/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/texComInfo/note/@codeList`) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*
(XPath `TEXCatalog/texComInfo/operationalCode/@codeList`) [Optional]
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/pattern/@codeList`) [Optional]

- nota: *this attribute should be ALTERNATIVE to the others*
(XPath `TEXCatalog/TCbody/TCgroup/artGroup/@codeList`) [Optional]

- nota: *this attribute should be ALTERNATIVE to the others*
(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/brand/@codeList`) [Optional]

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/legalRef/@codeList</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/note/@codeList</code>) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/season/@codeList</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/season/@codeList</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/THeader/picture/note/@codeList</code>) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p> <p>(XPath <code>TEXCatalog/THeader/season/@codeList</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/THeader/refDoc/season/@codeList</code>) [Optional]</p>
@codeQualifier	<p>operational code qualifier: it states if the code is related to a project, an event, an initiative, a sales channel, a management type (eg CITES),</p> <p>- base type: string, cod. table: NT43</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT43.xml</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode/@codeQualifier</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/texComInfo/operationalCode/@codeQualifier</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode/@codeQualifier</code>) [Optional]</p>
color	<p>colour number of the product, when not included in the model or fabric code</p> <p>- base type: string, max length: 15,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/color</code>) 0-unbounded</p> <p>- note: <i>this element can be repeated to highlight the color range of the article as long as the values of the relative attributes are equal (numberingOrg et c.)</i></p>
country	<p>code of the nation</p> <p>- base type: string, cod. table: T10</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml</p> <p>(XPath <code>TEXCatalog/THeader/buyer/country</code>) 0-1</p> <p>(XPath <code>TEXCatalog/THeader/thirdParty/country</code>) 0-1</p> <p>(XPath <code>TEXCatalog/THeader/supplier/country</code>) 0-1</p>
@currency	<p>currency in which a specified monetary data is expressed</p> <p>- base type: string, cod. table: T9</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice/@currency</code>) [Optional]</p> <p>- nota: <i>Currency referred by the price.</i></p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/@currency</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/@currency</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/terms/allowanceCharge/@currency</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice/@currency</code>) [Optional]</p> <p>- nota: <i>Currency referred by the price.</i></p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/@currency</code>) [Optional]</p>
customsStat	<p>statistic code assigned by Customs to a specified product</p> <p>- base type: string, max length: 15,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/customsStat</code>) 0-1</p>
@dateForm	<p>format used for the date</p> <p>- base type: string, cod. table: NT29</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT29.xml</p> <p>(XPath <code>TEXCatalog/texComInfo/deliveryDate/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/terms/transInfo/delEffectiveDate/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/terms/transInfo/despatchDate/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/docDate/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/texComInfo/specDate/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/validityEnd/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/validityStart/@dateForm</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/THeader/validityEnd/@dateForm</code>) [Optional]</p>

	<p>(XPath TEXCatalog/THeader/refDoc/docDate/@dateForm) [Optional] (XPath TEXCatalog/THeader/picture/validityStart/@dateForm) [Optional] (XPath TEXCatalog/THeader/picture/validityEnd/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/TCitem/texComInfo/specDate/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/TCitem/texComInfo/deliveryDate/@dateForm) [Optional] (XPath TEXCatalog/THeader/msgDate/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/texComInfo/specDate/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/texComInfo/deliveryDate/@dateForm) [Optional] (XPath TEXCatalog/THeader/validityStart/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/TCitem/picture/validityEnd/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/TCitem/picture/validityStart/@dateForm) [Optional] (XPath TEXCatalog/Tbody/TCgroup/TCitem/refDoc/docDate/@dateForm) [Optional]</p>
delEffectiveDate	<p>effective date of delivery of goods (declared in Despatch), according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath TEXCatalog/terms/transInfo/delEffectiveDate) 0-1</p>
deliveryDate	<p>date of delivery of goods, requested or promised in the purchase process, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath TEXCatalog/Tbody/TCgroup/TCitem/texComInfo/deliveryDate) 0-1 (XPath TEXCatalog/texComInfo/deliveryDate) 0-1 (XPath TEXCatalog/Tbody/TCgroup/texComInfo/deliveryDate) 0-1</p>
deliveryPlace	<p>place of delivery of goods, ultimate or related to a given leg - base type: string, max length: 250, (XPath TEXCatalog/terms/transInfo/deliveryPlace) 0-1</p>
dept	<p>name or code of a contact department within a Party - base type: string, max length: 40, (XPath TEXCatalog/THeader/thirdParty/dept) 0-1 (XPath TEXCatalog/THeader/supplier/dept) 0-1 (XPath TEXCatalog/THeader/buyer/dept) 0-1</p>
description	<p>free text description. The content of the element must be unique, it might be translated and repeated into more languages (thus no more than one instance for each language). - base type: string, max length: 250, (XPath TEXCatalog/Tbody/TCgroup/TCitem/description) 0-unbounded - note: <i>Product description</i> (XPath TEXCatalog/THeader/picture/description) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/Tbody/TCgroup/picture/description) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/Tbody/TCgroup/description) 0-unbounded - note: <i>group description</i> (XPath TEXCatalog/Tbody/TCgroup/TCitem/picture/description) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i></p>
despatchDate	<p>date of despatch of goods, requested or promised in the purchase process, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath TEXCatalog/terms/transInfo/despatchDate) 0-1</p>

despatchPlace	place of despatch of goods, origin or related to a given leg - base type: string, max length: 250, (XPath TEXCatalog/terms/transInfo/despatchPlace) 0-1
docDate	date of issue of the referenced document, according to one of the patterns Y YYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath TEXCatalog/TCbody/TCgroup/refDoc/docDate) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/docDate) 0-1 (XPath TEXCatalog/THeader/refDoc/docDate) 0-1
docID	identification number of the referenced document SINCE 2008-1 ITS USE I N THE HEADER IS DISCOURAGED (REPLACED BY msgID) - base type: string, max length: 80, (XPath TEXCatalog/THeader/docID) 0-1 (XPath TEXCatalog/TCbody/TCgroup/refDoc/docID) 1-2 (XPath TEXCatalog/THeader/refDoc/docID) 1-2 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/docID) 1-2
@docType	type or class to which the referenced document belongs - base type: string, cod. table: T21 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T21.xml (XPath TEXCatalog/TCbody/TCgroup/refDoc/@docType) [Required] (XPath TEXCatalog/THeader/refDoc/@docType) [Required] (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/@docType) [Required]
dyeProcess	dye process applied to the fabric - base type: string, cod. table: T15 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T15.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/dyeProcess) 0-1
dyeStuff	dye stuff used in the fabric dye process - base type: string, cod. table: T16 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T16.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/dyeStuff) 0-1
@email	electronic mail address of the contact person within a Party - base type: string, max length: 250, (XPath TEXCatalog/THeader/buyer/person/@email) [Optional] (XPath TEXCatalog/THeader/thirdParty/person/@email) [Optional] (XPath TEXCatalog/THeader/supplier/person/@email) [Optional]
@encoding	specifies the decoding algorithm of the binary object - base type: normalizedString, (XPath TEXCatalog/THeader/picture/attachment/binaryObject/@encoding) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/binaryObject/@encoding) [Optional] (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/binaryObject/@encoding) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/binaryObject/@encoding) [Optional] (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/binaryObject/@encoding) [Optional] (XPath TEXCatalog/THeader/refDoc/attachment/binaryObject/@encoding) [Optional]
encodingCode	the encoding/decoding algorithm used with the external object - base type: normalizedString, (XPath TEXCatalog/THeader/refDoc/attachment/externalReference/encodingCode) 0-1 (XPath TEXCatalog/THeader/picture/attachment/externalReference/encodingCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/encodingCode) 0-1

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/encodingCode</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/encodingCode</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/encodingCode</code>) 0-1</p>
@endUse	<p>specifies the final use of the fabric</p> <p>- base type: string, cod. table: NT4</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT4.xml</p> <p>(XPath <code>TEXCatalog/texComInfo/@endUse</code>) [Optional] [Default= PR]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/@endUse</code>) [Optional] [Default= PR]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/@endUse</code>) [Optional] [Default= PR]</p>
estFaultiness	<p>percent faultiness of an article, estimated by the Supplier</p> <p>- base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/estFaultiness</code>) 0-1</p>
extendedDescription	<p>extended free text description. The content of the element must be unique, it might be translated and repeated into more languages (thus no more than one instance for each language). This element might contain HTML code (must be managed as CDATA)</p> <p>- base type: string,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/extendedDescription</code>) 0-unbounded</p> <p>- note: <i>group extended description</i></p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/extendedDescription</code>) 0-unbounded</p> <p>- note: <i>Extended product description</i></p>
fabricCutWidth	<p>usable width of the fabric (for garments manufacturing) as technical specification</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricCutWidth</code>) 0-1</p>
fabricNameBuyer	<p>name given to the fabric (article/pattern) by the Buyer</p> <p>- base type: string, max length: 250,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/fabricNameBuyer</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/fabricNameBuyer</code>) 0-1</p> <p>- note: <i>Do not specify this information when generalChar is obtained in TCItem; specify it at the TCItem level.</i></p>
fabricNameSupplier	<p>name given to the fabric (article/pattern) by the Supplier</p> <p>- base type: string, max length: 250,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/fabricNameSupplier</code>) 0-1</p> <p>- note: <i>Do not specify this information when generalChar is obtained in TCItem; specify it at the TCItem level.</i></p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/fabricNameSupplier</code>) 0-1</p>
fabricWeightM	<p>weight per metre of the fabric as technical specification</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWeightM</code>) 1-1</p>
fabricWeightM2	<p>weight per square metre of the fabric as technical specification</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWeightM2</code>) 0-1</p>
fabricWidth	<p>width of the fabric as technical specification</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath <code>TEXCatalog/texComInfo/fabricWidth</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/fabricWidth</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/fabricWidth</code>) 0-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWidth</code>) 0-1</p>
@fax	<p>fax number of the contact person within a Party</p> <p>- base type: string, max length: 35,</p> <p>(XPath <code>TEXCatalog/TCheader/thirdParty/person/@fax</code>) [Optional]</p>

	(XPath <code>TEXCatalog/TCheader/supplier/person/@fax</code>) [Optional] (XPath <code>TEXCatalog/TCheader/buyer/person/@fax</code>) [Optional]
@fibre	type of fibre used in a textile product - base type: string, cod. table: T19 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T19.xml (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/fabricCompos/percCompos/@fibre</code>) [Required] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/weftCount/@fibre</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/warpCount/@fibre</code>) [Optional]
fileName	unique identifier (name) of the file - base type: string, max length: 255, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/fileName</code>) 0-1 (XPath <code>TEXCatalog/TCheader/refDoc/attachment/fileName</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/fileName</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/fileName</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/picture/attachment/fileName</code>) 0-1 (XPath <code>TEXCatalog/TCheader/picture/attachment/fileName</code>) 0-1
@finDiscount	financial discount rate applied for payment by the date specified - base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath <code>TEXCatalog/terms/payment/@finDiscount</code>) [Optional]
@finSurcharge	financial surcharge rate applied for payment after the date specified - base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath <code>TEXCatalog/terms/payment/@finSurcharge</code>) [Optional]
@format	the format of the binary content - base type: string, (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/binaryObject/@format</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/picture/attachment/binaryObject/@format</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/binaryObject/@format</code>) [Optional] (XPath <code>TEXCatalog/TCheader/picture/attachment/binaryObject/@format</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/binaryObject/@format</code>) [Optional] (XPath <code>TEXCatalog/TCheader/refDoc/attachment/binaryObject/@format</code>) [Optional]
formatCode	the format of the external object - base type: normalizedString, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/formatCode</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/formatCode</code>) 0-1 (XPath <code>TEXCatalog/TCheader/refDoc/attachment/externalReference/formatCode</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/formatCode</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/formatCode</code>) 0-1 (XPath <code>TEXCatalog/TCheader/picture/attachment/externalReference/formatCode</code>) 0-1
@garmentMarket	market segment for the product - base type: string, length: 255, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice/@garmentMarket</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice/@garmentMarket</code>) [Optional]

geographicAreaCode	code identifying a geographic area - base type: string, cod. table: T10 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/geographicArea/geographicAreaCode) 1-1
geographicAreaText	text identifying a geographic area - base type: string, (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/geographicArea/geographicAreaText) 1-1 <hr/> AAAA-WARNING! - text not AVAILABLE n. 245 - In=en
grossWeight	the gross weight, declared for transport or customs purpose - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/terms/transInfo/grossWeight) 0-1
height	effective height of a specified object - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/THeader/picture/height) 0-1 - note: <i>the 'um' attribute of this element must be 'E37' (pixel)</i> (XPath TEXCatalog/TCbody/TCgroup/picture/height) 0-1 - note: <i>the 'um' attribute of this element must be 'E37' (pixel)</i> (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/height) 0-1 - note: <i>the 'um' attribute of this element must be 'E37' (pixel)</i>
@IC	specifies if the "illustrated confirmation" is needed - base type: boolean, (XPath TEXCatalog/texComInfo/@IC) [Optional] (XPath TEXCatalog/TCbody/TCgroup/texComInfo/@IC) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/@IC) [Optional]
id	primary identification code of a Party; it is recommended the format: nation code (ISO 3166) + VAT identification number (11 crt), with the qualifier "numberingOrg"= MF - base type: string, max length: 15, (XPath TEXCatalog/THeader/buyer/id) 1-1 (XPath TEXCatalog/THeader/supplier/id) 1-1 (XPath TEXCatalog/THeader/thirdParty/id) 1-1
@idQualifier	Qualification of the identifier. - base type: string, (XPath TEXCatalog/THeader/supplier/additionalIdentifier/@idQualifier) [Optional] - nota: <i>this attribute should be used when the numberingOrg attribute is not enough to declare the type of identifier</i> (XPath TEXCatalog/THeader/buyer/additionalIdentifier/@idQualifier) [Optional] - nota: <i>this attribute should be used when the numberingOrg attribute is not enough to declare the type of identifier</i>
incoTerm	specification of the terms of trade (INCOTERMS) - base type: string, cod. table: T3 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T3.xml (XPath TEXCatalog/terms/trade/incoTerm) 1-1
incoTermText	free text specifying the terms of trade (incoterm, location) - base type: string, max length: 250, (XPath TEXCatalog/terms/trade/incoTermText) 1-1
@isURL	it indicates if the referred element is an URL (true) or not (false) - base type: boolean, (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i> (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/uri/@isURL) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i>

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/uri/@isURL</code>) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i> (XPath <code>TEXCatalog/TCheader/refDoc/attachment/externalReference/uri/@isURL</code>) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i> (XPath <code>TEXCatalog/TCheader/picture/attachment/externalReference/uri/@isURL</code>) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i> (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/uri/@isURL</code>) [Optional] [Default= true] - nota: <i>usage of URLs is recommended</i></p>
itemID	<p>number of the line/item of the referenced document - base type: string, max length: 6, (XPath <code>TEXCatalog/TCheader/refDoc/itemID</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/itemID</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/itemID</code>) 0-1</p>
legalName	<p>legal name of a Party - base type: string, max length: 250, (XPath <code>TEXCatalog/TCheader/thirdParty/legalName</code>) 0-1 (XPath <code>TEXCatalog/TCheader/buyer/legalName</code>) 0-1 (XPath <code>TEXCatalog/TCheader/supplier/legalName</code>) 0-1</p>
legalRef	<p>legal reference of the duty or tax or fee category - base type: string, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/legalRef</code>) 0-1 (XPath <code>TEXCatalog/terms/allowanceCharge/dtScheme/legalRef</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/legalRef</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/legalRef</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/legalRef</code>) 0-1</p>
lineN	<p>number of the line item of the present message (xml document); it is set by the role that produces the document. Usually it is a progressive number, but not always. - base type: positiveInteger, min inclusive: 1, max inclusive: 9999, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/lineN</code>) 0-1</p>
@listName	<p>the name of the list of codes used to make an instance of the element (it might be thought as descriptive element, i.e. 'fabric printing technologies', or not, i.e. "T264") - base type: string, max length: 40, (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/color/@listName</code>) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/productLine/@listName</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/operationalCode/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/pattern/@listName</code>) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/art/@listName</code>) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/productLine/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/brand/@listName</code>) [Optional]</p>

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/artGroup/@listName</code>) [Optional] - nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath <code>TEXCatalog/THeader/refDoc/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/brand/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/productLine/@listName</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/brand/@listName</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/season/@listName</code>) [Optional] (XPath <code>TEXCatalog/THeader/season/@listName</code>) [Optional]</p>
<code>@listVersion</code>	<p>it specifies the version of the list of codes used to make an instance of the element - base type: string, max length: 6, (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/productLine/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/brand/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/THeader/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/artGroup/@listVersion</code>) [Optional] - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/THeader/refDoc/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/productLine/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/brand/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/productLine/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/operationalCode/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/season/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/art/@listVersion</code>) [Optional] - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath <code>TEXCatalog/texComInfo/brand/@listVersion</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/color/@listVersion</code>) [Optional] - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/pattern/@listVersion</code>) [Optional] - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/season/@listVersion</code>) [Optional]</p>
<code>@ln</code>	<p>Language code. - base type: string, (XPath <code>TEXCatalog/TCbody/TCgroup/picture/title/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/description/@ln</code>) [Optional] (XPath <code>TEXCatalog/THeader/picture/title/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/title/@ln</code>) [Optional] (XPath <code>TEXCatalog/THeader/picture/description/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/picture/alternativeText/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/alternativeText/@ln</code>) [Optional]</p>

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/description/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/extendedDescription/@ln</code>) [Optional] (XPath <code>TEXCatalog/THeader/picture/alternativeText/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/picture/description/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/description/@ln</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/extendedDescription/@ln</code>) [Optional]</p>
location	<p>specification of a location - base type: string, max length: 40, (XPath <code>TEXCatalog/terms/trade/location</code>) 0-1 - note: <i>place to which the INCOTERM applies</i></p>
@logo	<p>company logo (URL of the image jpeg or gif). It is recommended that the width of the image does not exceed 640 pixel. - base type: string, max length: 255, (XPath <code>TEXCatalog/THeader/buyer/@logo</code>) [Optional] (XPath <code>TEXCatalog/THeader/supplier/@logo</code>) [Optional]</p>
@LRI	<p>attribute usable to format a string according to a customized User rule (local rule) - base type: string, cod. table: NT3 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT3.xml (XPath <code>TEXCatalog/terms/trade/location/@LRI</code>) [Optional]</p>
@maxQty	<p>maximum product quantity - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this allowance or charge</i> (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this allowance or charge</i> (XPath <code>TEXCatalog/terms/allowanceCharge/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this allowance or charge</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this price</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this price</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/@maxQty</code>) [Optional] - nota: <i>maximum quantity of product for the application of this allowance or charge</i></p>
@method	<p>standard protocol or method employed in a test to evaluate a characteristic or a parameter - base type: string, max length: 80, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/weftCount/@method</code>) [Optional] [Default= ISO-2060] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/warpCount/@method</code>) [Optional] [Default= ISO-2060] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/weftDev/@method</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/checksFlaw/@method</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/bowingWarp/@method</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/bowingWeft/@method</code>) [Optional]</p>
@mime	<p>the mime type of the binary object - base type: normalizedString,</p>

	<p>(XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/binaryObject/@mime) [Optional]</p> <p>(XPath TEXCatalog/THeader/picture/attachment/binaryObject/@mime) [Optional]</p> <p>(XPath TEXCatalog/THeader/refDoc/attachment/binaryObject/@mime) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/picture/attachment/binaryObject/@mime) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/binaryObject/@mime) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/binaryObject/@mime) [Optional]</p>
mimeCode	<p>mime type of the external object</p> <p>- base type: normalizedString,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/mimeCode) 0-1</p> <p>(XPath TEXCatalog/THeader/picture/attachment/externalReference/mimeCode) 0-1</p> <p>(XPath TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/mimeCode) 0-1</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/mimeCode) 0-1</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/mimeCode) 0-1</p> <p>(XPath TEXCatalog/THeader/refDoc/attachment/externalReference/mimeCode) 0-1</p>
minLot	<p>minimum order quantity of a product requested by the Supplier</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/minLot) 0-1</p>
minLotExclusive	<p>minimum order quantity of a product requested by the Supplier for an exclusive color</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/minLotExclusive) 0-1</p>
@minQty	<p>minimum product quantity</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this price</i></p> <p>(XPath TEXCatalog/TCbody/TCgroup/allowanceCharge/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this allowance or charge</i></p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this allowance or charge</i></p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this allowance or charge</i></p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this price</i></p> <p>(XPath TEXCatalog/terms/allowanceCharge/@minQty) [Optional]</p> <p>- nota: <i>minimum quantity of product for the application of this allowance or charge</i></p>
msgCurrency	<p>currency used to express the monetary amounts of the message</p> <p>- base type: string, cod. table: T9</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml</p> <p>(XPath TEXCatalog/THeader/msgCurrency) 0-1</p>

msgDate	date of issue of the present message (xml document), according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath TEXCatalog/TCheader/msgDate) 1-1
@msgfunction	function performed by the present message with regards to the transmission - base type: string, cod. table: NT18 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT18.xml (XPath TEXCatalog/@msgfunction) [Optional] [Default= OR]
msgID	key identifier of the business document in the information system of the issuing Party. In case of more despatches of the same business document, it is unchanged. - base type: string, max length: 35, (XPath TEXCatalog/TCheader/msgID) 0-1
msgN	identification number given to the message (xml document) by its issuer. In case of more despatches of the same business document, it changes. - base type: string, max length: 35, (XPath TEXCatalog/TCheader/msgN) 1-1
netWeight	the net weight declared for transport or customs purpose - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/terms/transInfo/netWeight) 0-1
nominalHeight	nominal height of a specified object - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/TCbody/TCgroup/picture/nominalHeight) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i> (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/nominalHeight) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i> (XPath TEXCatalog/TCheader/picture/nominalHeight) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i>
nominalWidth	nominal width of a specified object - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/nominalWidth) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i> (XPath TEXCatalog/TCbody/TCgroup/picture/nominalWidth) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i> (XPath TEXCatalog/TCheader/picture/nominalWidth) 0-2 - note: <i>Only one instance of this element for each different value of 'um' attribute (unit of measure)</i>
note	free text or structured (computer processing) note. For note structuring use the attributes "noteLabel" and "codelist" - base type: string, max length: 350, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/note) 0-99 (XPath TEXCatalog/texComInfo/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/note) 0-99 (XPath TEXCatalog/terms/allowanceCharge/dtScheme/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/note) 0-99 (XPath TEXCatalog/TCheader/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/note) 0-99 (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/note) 0-99 - note: <i>here the charges for sub-optimized quantities or for samples can be specified</i> (XPath TEXCatalog/TCbody/TCgroup/picture/note) 0-99

	<p>(XPath <code>TEXCatalog/THeader/picture/note</code>) 0-99 (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/note</code>) 0-99 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/note</code>) 0-99 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/note</code>) 0-99</p>
@noteLabel	<p>subject qualifier of a note</p> <ul style="list-style-type: none"> - base type: string, max length: 35, (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/THeader/picture/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/THeader/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/picture/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/terms/allowanceCharge/dtScheme/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/texComInfo/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i> (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/note/@noteLabel</code>) [Optional] - nota: <i>must be used to qualify the subject of the note</i>
@numberingOrg	<p>code specifying the organisation who has created or owns the coding or numbering system</p> <ul style="list-style-type: none"> - base type: string, cod. table: NT6 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT6.xml (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/docID/@numberingOrg</code>) [Optional] - nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i> (XPath <code>TEXCatalog/texComInfo/brand/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/season/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/added/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/fileName/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/note/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/texComInfo/productLine/@numberingOrg</code>) [Optional] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/art/@numberingOrg</code>) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath <code>TEXCatalog/TCbody/TCgroup/picture/attachment/fileName/@numberingOrg</code>) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/picture/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/texComInfo/season/@numberingOrg`) [Optional]

(XPath `TEXCatalog/texComInfo/operationalCode/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/refDoc/attachment/fileName/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/color/@numberingOrg`) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath `TEXCatalog/THeader/docID/@numberingOrg`) [Optional]

- nota: *here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)*

(XPath `TEXCatalog/THeader/thirdParty/id/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/pattern/@numberingOrg`) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath `TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/refDoc/docID/@numberingOrg`) [Optional]

- nota: *here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)*

(XPath `TEXCatalog/TCbody/TCgroup/artGroup/@numberingOrg`) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/refDoc/season/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/generalChar/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/refDoc/docID/@numberingOrg`) [Optional]

- nota: *here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)*

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/supplier/additionalIdentifier/@numberingOrg`) [Optional]

- nota: *here the issuer of the identifier must be specified*

(XPath `TEXCatalog/THeader/supplier/id/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/buyer/additionalIdentifier/@numberingOrg`) [Optional]

- nota: *here the issuer of the identifier must be specified*

(XPath `TEXCatalog/THeader/refDoc/season/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/brand/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/season/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/buyer/id/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/productLine/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/fileName/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/picture/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/THeader/refDoc/attachment/fileName/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/terms/allowanceCharge/dtScheme/note/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode/@numberingOrg`) [Optional]

(XPath `TEXCatalog/TCbody/TCgroup/texComInfo/season/@numberingOrg`) [Optional]

	<p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/note/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/THeader/season/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/texComInfo/brand/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/THeader/picture/note/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/texComInfo/productLine/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/season/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/texComInfo/note/@numberingOrg) [Optional]</p> <p>(XPath TEXCatalog/THeader/picture/attachment/fileName/@numberingOrg) [Optional]</p>
operationalCode	<p>operational code: it is the code of a project, an event, an initiative, a sales channel, a management type (eg CITES), ... the document, or product, is connected with.</p> <p>- base type: string,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/texComInfo/operationalCode) 0-19</p> <p>(XPath TEXCatalog/texComInfo/operationalCode) 0-19</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/operationalCode) 0-19</p>
@part	<p>percent fraction of a total payment</p> <p>- base type: decimal, min inclusive: 1, max inclusive: 99, fraction digits: 2,</p> <p>(XPath TEXCatalog/terms/insPayment/@part) [Required]</p> <p>- nota: <i>here the % value of each installment must be indicated</i></p>
pattern	<p>pattern/design number of the product, when not included in the article code</p> <p>- base type: string, max length: 15,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/pattern) 0-unbounded</p> <p>- note: <i>this element can be repeated to highlight the patterns of the article as long as the values of the relative attributes are equal (numberingOrg etc.)</i></p>
payMode	<p>way or means of payment</p> <p>- base type: string, cod. table: T2</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T2.xml</p> <p>(XPath TEXCatalog/terms/insPayment/payMode) 0-1</p> <p>(XPath TEXCatalog/terms/payment/payMode) 0-1</p>
payTerm	<p>code specifying the terms or time by which the payment must be done</p> <p>- base type: string, cod. table: T1</p> <p>http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T1.xml</p> <p>(XPath TEXCatalog/terms/insPayment/payTerm) 1-1</p> <p>(XPath TEXCatalog/terms/payment/payTerm) 1-1</p>
payTermText	<p>free text specifying the terms by which the payment must be done (time/mode or means)</p> <p>- base type: string, max length: 250,</p> <p>(XPath TEXCatalog/terms/insPayment/payTermText) 1-1</p> <p>(XPath TEXCatalog/terms/payment/payTermText) 1-1</p>
percCompos	<p>fiber rate in the product composition</p> <p>- base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2,</p> <p>(XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/fabricCompos/percCompos) 1-9</p>
person	<p>name of the contact person within a Party</p> <p>- base type: string, max length: 40,</p> <p>(XPath TEXCatalog/THeader/buyer/person) 0-1</p> <p>(XPath TEXCatalog/THeader/supplier/person) 0-1</p> <p>(XPath TEXCatalog/THeader/thirdParty/person) 0-1</p>
@phone	<p>phone number of the contact person within a Party</p> <p>- base type: string, max length: 35,</p> <p>(XPath TEXCatalog/THeader/supplier/person/@phone) [Optional]</p>

	(XPath TEXCatalog/TCheader/buyer/person/@phone) [Optional] (XPath TEXCatalog/TCheader/thirdParty/person/@phone) [Optional]
pictureCode	picture code (it might be shared among more files) - base type: string, max length: 80, (XPath TEXCatalog/TCbody/TCgroup/picture/pictureCode) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/pictureCode) 0-1 (XPath TEXCatalog/TCheader/picture/pictureCode) 0-1
pictureQualifier	qualifies the image from the business point of view (i.e. main image, detail image,...) - base type: string, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/pictureQualifier) 0-1 (XPath TEXCatalog/TCheader/picture/pictureQualifier) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/pictureQualifier) 0-1
pictureUse	picture final use - base type: string, cod. table: NT72 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT72.xml (XPath TEXCatalog/TCbody/TCgroup/picture/pictureUse) 0-1 (XPath TEXCatalog/TCheader/picture/pictureUse) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/pictureUse) 0-1
pieceInnWrap1	code specifying the type of inner wrapping/packing used for the fabric piece - base type: string, cod. table: T4 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T4.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/piecePack/pieceInnWrap1) 1-1 (XPath TEXCatalog/TCbody/TCgroup/texComInfo/piecePack/pieceInnWrap1) 1-1 (XPath TEXCatalog/texComInfo/piecePack/pieceInnWrap1) 1-1
pieceInnWrap2	code sub-specifying the type of inner wrapping/packing used for the fabric piece - base type: string, cod. table: T5 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T5.xml (XPath TEXCatalog/TCbody/TCgroup/texComInfo/piecePack/pieceInnWrap2) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/piecePack/pieceInnWrap2) 0-1 (XPath TEXCatalog/texComInfo/piecePack/pieceInnWrap2) 0-1
pieceLength	length of the piece - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/pieceLength) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/pieceLength) 0-1 (XPath TEXCatalog/TCbody/TCgroup/texComInfo/pieceLength) 0-1 (XPath TEXCatalog/texComInfo/pieceLength) 0-1
pieceOutWrap	code specifying the type of outer wrapping or packing used for the fabric piece - base type: string, cod. table: T6 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T6.xml (XPath TEXCatalog/TCbody/TCgroup/texComInfo/piecePack/pieceOutWrap) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/piecePack/pieceOutWrap) 0-1 (XPath TEXCatalog/texComInfo/piecePack/pieceOutWrap) 0-1
piecePackText	free text specifying the type of wrapping or packing used for the fabric piece - base type: string, max length: 250, (XPath TEXCatalog/TCbody/TCgroup/texComInfo/piecePack/piecePackText) 1-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/piecePack/piecePackText) 1-1 (XPath TEXCatalog/texComInfo/piecePack/piecePackText) 1-1
postCode	code defining the postal zone - base type: string, max length: 10, (XPath TEXCatalog/TCheader/thirdParty/postCode) 0-1 (XPath TEXCatalog/TCheader/buyer/postCode) 0-1 (XPath TEXCatalog/TCheader/supplier/postCode) 0-1

productLine	<p>the product line name of a fashion product.</p> <p>- base type: string, (XPath TEXCatalog/TCbody/TCgroup/texComInfo/productLine) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/productLine) 0-1 (XPath TEXCatalog/texComInfo/productLine) 0-1</p>
@progr	<p>progressive number in the sequence</p> <p>- base type: positiveInteger, min inclusive: 1, (XPath TEXCatalog/terms/transInfo/@progr) [Optional] - nota: <i>Indicates the position of the leg in a sequence of transport legs.</i></p>
project	<p>code used to assign the items ordered (fabric pieces, accessories, garments ...) to a specific project of the Client</p> <p>- base type: string, max length: 40, (XPath TEXCatalog/TCbody/TCgroup/texComInfo/project) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/project) 0-1 (XPath TEXCatalog/texComInfo/project) 0-1</p>
rendering	<p>rendering information about the image</p> <p>- base type: string, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/rendering) 0-1 (XPath TEXCatalog/THeader/picture/rendering) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/rendering) 0-1</p>
resin	<p>resin (coating) percentage in finished weight</p> <p>- base type: decimal, min inclusive: 0, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/resin) 0-1</p>
resolution	<p>measure of spatial density of the picture</p> <p>- base type: string, max length: 255, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/resolution) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/resolution) 0-1 (XPath TEXCatalog/THeader/picture/resolution) 0-1</p>
@resolutionType	<p>it indicates the type of density of the picture</p> <p>- base type: string, cod. table: NT71 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT71.xml (XPath TEXCatalog/THeader/picture/resolution/@resolutionType) [Optional] [Default= dpi] (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/resolution/@resolutionType) [Optional] [Default= dpi] (XPath TEXCatalog/TCbody/TCgroup/picture/resolution/@resolutionType) [Optional] [Default= dpi]</p>
@role	<p>Third Party role qualifier</p> <p>- base type: string, cod. table: NT2 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT2.xml (XPath TEXCatalog/THeader/thirdParty/@role) [Required]</p>
season	<p>sale season; defined as: season (1 crt) + year (4 crt) - season: S/S=1 A/W=2 Spring=3 Summer=4 Autumn=5 Winter=6: for more than four seasons use alphabetic sequence: 1st season=A 2nd season=B etc.etc.</p> <p>- base type: string, max length: 15, (XPath TEXCatalog/texComInfo/season) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/season) 0-1 - note: <i>here indicates the season to which the referenced document belongs</i> (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/season) 0-1 (XPath TEXCatalog/THeader/season) 0-1 (XPath TEXCatalog/THeader/refDoc/season) 0-1 - note: <i>here indicates the season to which the referenced document belongs</i> (XPath TEXCatalog/TCbody/TCgroup/texComInfo/season) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/season) 0-1 (XPath TEXCatalog/TCbody/TCgroup/refDoc/season) 0-1 - note: <i>here indicates the season to which the referenced document belongs</i></p>
@sender	<p>qualifier that specifies the Party issuing of the document</p> <p>- base type: boolean,</p>

	<p>(XPath <code>TEXCatalog/TCheader/thirdParty/@sender</code>) [Optional] - nota: <i>This attribute is mandatory when the STYLESHEET must be used</i> (XPath <code>TEXCatalog/TCheader/buyer/@sender</code>) [Optional] - nota: <i>This attribute is mandatory when the STYLESHEET must be used</i> (XPath <code>TEXCatalog/TCheader/supplier/@sender</code>) [Optional] - nota: <i>This attribute is mandatory when the STYLESHEET must be used</i></p>
specDate	<p>date by which the referenced blanket order must receive full product specific ations (e.g.: colour), according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW. - base type: string, (XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/specDate</code>) 0-1 (XPath <code>TEXCatalog/texComInfo/specDate</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/specDate</code>) 0-1</p>
street	<p>street and building number identifying a location - base type: string, max length: 80, (XPath <code>TEXCatalog/TCheader/buyer/street</code>) 0-1 (XPath <code>TEXCatalog/TCheader/thirdParty/street</code>) 0-1 (XPath <code>TEXCatalog/TCheader/supplier/street</code>) 0-1</p>
subCountry	<p>short name or code of the sub-country entity - base type: string, max length: 9, (XPath <code>TEXCatalog/TCheader/buyer/subCountry</code>) 0-1 (XPath <code>TEXCatalog/TCheader/thirdParty/subCountry</code>) 0-1 (XPath <code>TEXCatalog/TCheader/supplier/subCountry</code>) 0-1</p>
subDept	<p>name or code of a contact department within a Party - base type: string, max length: 40, (XPath <code>TEXCatalog/TCheader/thirdParty/subDept</code>) 0-1 (XPath <code>TEXCatalog/TCheader/supplier/subDept</code>) 0-1 (XPath <code>TEXCatalog/TCheader/buyer/subDept</code>) 0-1</p>
taxCategory	<p>duty or tax or fee category - base type: string, cod. table: T62 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T62.xml (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/taxCategory</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/taxCategory</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/taxCategory</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/taxCategory</code>) 0-1 (XPath <code>TEXCatalog/terms/allowanceCharge/dtScheme/taxCategory</code>) 0-1</p>
taxRate	<p>duty or tax or fee percent rate - base type: string, (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/taxRate</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/taxRate</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/taxRate</code>) 0-1 (XPath <code>TEXCatalog/terms/allowanceCharge/dtScheme/taxRate</code>) 0-1 (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/taxRate</code>) 0-1</p>
@taxType	<p>duty or tax or fee type - base type: string, cod. table: T61 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T61.xml (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/dtScheme/@taxType</code>) [Required] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/dtScheme/@taxType</code>) [Required] (XPath <code>TEXCatalog/terms/allowanceCharge/dtScheme/@taxType</code>) [Required] (XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/dtScheme/@taxType</code>) [Required] (XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/dtScheme/@taxType</code>) [Required]</p>

@techSheet	<p>specifies if the " technical characteristics of fabric" document must provided</p> <ul style="list-style-type: none"> - base type: boolean, (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/@techSheet) [Optional] (XPath TEXCatalog/texComInfo/@techSheet) [Optional] (XPath TEXCatalog/TCbody/TCgroup/texComInfo/@techSheet) [Optional]
title	<p>document title</p> <ul style="list-style-type: none"> - base type: string, (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/title) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/TCheader/picture/title) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i> (XPath TEXCatalog/TCbody/TCgroup/picture/title) 0-unbounded - note: <i>Only one instance of this element for each different value of 'ln' attribute (language)</i>
tradeMark	<p>name of the official trademark of a specified product (DEPRECATED, use Brand or Product Line).</p> <ul style="list-style-type: none"> - base type: string, max length: 50, (XPath TEXCatalog/TCbody/TCgroup/TCitem/generalChar/tradeMark) 0-1
transCondition	<p>special condition of transport or special service requested to the Forwarder</p> <ul style="list-style-type: none"> - base type: string, cod. table: T38 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T38.xml (XPath TEXCatalog/terms/transInfo/transCondition) 0-3
transConditionText	<p>free text description of the special condition of transport or special service requested to the Forwarder</p> <ul style="list-style-type: none"> - base type: string, max length: 250, (XPath TEXCatalog/terms/transInfo/transConditionText) 0-1
transMeans	<p>means of transport, in general or referred to a specific leg</p> <ul style="list-style-type: none"> - base type: string, cod. table: T40 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T40.xml (XPath TEXCatalog/terms/transInfo/transMeans) 0-1
transMode	<p>way of transport, in general or referred to the specified leg</p> <ul style="list-style-type: none"> - base type: string, cod. table: T8 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T8.xml (XPath TEXCatalog/terms/transInfo/transMode) 1-1
@transReason	<p>reason for the transport</p> <ul style="list-style-type: none"> - base type: string, cod. table: NT11 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT11.xml (XPath TEXCatalog/terms/transInfo/@transReason) [Optional]
@uid	<p>unique element identifier within the xml document</p> <ul style="list-style-type: none"> - base type: string, (XPath TEXCatalog/TCbody/TCgroup/picture/attachment/@uid) [Optional] (XPath TEXCatalog/TCheader/refDoc/attachment/@uid) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/@uid) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/@uid) [Optional] (XPath TEXCatalog/TCheader/picture/attachment/@uid) [Optional] (XPath TEXCatalog/TCbody/TCgroup/refDoc/attachment/@uid) [Optional]
@um	<p>specification of the unit of measure</p> <ul style="list-style-type: none"> - base type: string, cod. table: NT7 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT7.xml (XPath TEXCatalog/terms/allowanceCharge/@um) [Optional] (XPath TEXCatalog/terms/transInfo/netWeight/@um) [Required] (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/pieceLength/@um) [Optional] [Default= MTR] (XPath TEXCatalog/TCbody/TCgroup/TCitem/texComInfo/fabricWidth/@um) [Optional] [Default= CMT]

	<p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/catalogPrice/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/nominalHeight/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCheader/picture/height/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCheader/picture/width/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/width/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/allowanceCharge/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/catalogPrice/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/nominalWidth/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/height/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCheader/picture/nominalWidth/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/texComInfo/pieceLength/@um</code>) [Optional] [Default= MTR]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/width/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/pieceLength/@um</code>) [Optional] [Default= MTR]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/allowanceCharge/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/texComInfo/fabricWidth/@um</code>) [Optional] [Default= CMT]</p> <p>(XPath <code>TEXCatalog/texComInfo/fabricWidth/@um</code>) [Optional] [Default= CMT]</p> <p>(XPath <code>TEXCatalog/TCheader/picture/nominalHeight/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/nominalHeight/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/height/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/nominalWidth/@um</code>) [Optional]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWeightM2/@um</code>) [Optional] [Default= GRM]</p> <p>(XPath <code>TEXCatalog/terms/transInfo/grossWeight/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWeightM/@um</code>) [Optional] [Default= GRM]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/pieceLength/@um</code>) [Optional] [Default= MTR]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricCutWidth/@um</code>) [Optional] [Default= CMT]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/construction/fabricWidth/@um</code>) [Optional] [Default= CMT]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/minLotExclusive/@um</code>) [Required]</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/generalChar/minLot/@um</code>) [Required]</p>
uri	<p>Uniform Resource Identifier (URI) that identifies the external object as an Internet resource</p> <p>- base type: <code>normalizedString</code>,</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/refDoc/attachment/externalReference/uri</code>) 1-1</p> <p>(XPath <code>TEXCatalog/TCheader/refDoc/attachment/externalReference/uri</code>) 1-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/picture/attachment/externalReference/uri</code>) 1-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/TCitem/refDoc/attachment/externalReference/uri</code>) 1-1</p> <p>(XPath <code>TEXCatalog/TCheader/picture/attachment/externalReference/uri</code>) 1-1</p> <p>(XPath <code>TEXCatalog/TCbody/TCgroup/picture/attachment/externalReference/uri</code>) 1-1</p>
@useProfile	<p>use profile to which the present document is compliant if it was agreed by the parties. It is suggested a URI with reference to the firms or the URL of the profile.</p> <p>- base type: <code>string</code>,</p> <p>(XPath <code>TEXCatalog/@useProfile</code>) [Optional]</p>

validityEnd	<p>date by which the validity ends, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string, (XPath TEXCatalog/TCheader/validityEnd) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/validityEnd) 0-1 (XPath TEXCatalog/TCheader/picture/validityEnd) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/validityEnd) 0-1</p>
validityStart	<p>date by which the validity starts, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string, (XPath TEXCatalog/TCheader/validityStart) 0-1 (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/validityStart) 0-1 (XPath TEXCatalog/TCheader/picture/validityStart) 0-1 (XPath TEXCatalog/TCbody/TCgroup/picture/validityStart) 0-1</p>
@VAT	<p>VAT rate or code (DEPRECATED, use dtScheme element)</p> <p>- base type: string, cod. table: NT16 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT16.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/allowanceCharge/@VAT) [Optional] (XPath TEXCatalog/TCbody/TCgroup/allowanceCharge/@VAT) [Optional] (XPath TEXCatalog/TCbody/TCgroup/TCitem/lineN/@VAT) [Optional]</p> <p>- nota: <i>Deprecated, prefer dtScheme when available.</i> (XPath TEXCatalog/TCheader/thirdParty/@VAT) [Optional] (XPath TEXCatalog/terms/allowanceCharge/@VAT) [Optional]</p>
@version	<p>Dictionary version from which the instance has been created</p> <p>- base type: string, cod. table: NT100 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT100.xml (XPath TEXCatalog/@version) [Optional] [Default= draft]</p>
warpCount	<p>measure of thinness of the warp thread</p> <p>- base type: string, max length: 10, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/warpCount) 0-9</p>
warpEndsN	<p>number of warp threads in 1 centimetre</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 1, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/warpEndsN) 0-1</p>
weave	<p>type of weaving used in the manufacturing of fabric</p> <p>- base type: string, cod. table: T17 http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T17.xml (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/weave) 0-1</p>
weftCount	<p>measure of thinness of the weft thread</p> <p>- base type: string, max length: 10, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/weftCount) 0-9</p>
weftDev	<p>deviation from right angle in weft</p> <p>- base type: decimal, min inclusive: 0, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/weftDev) 0-1</p>
weftEndsN	<p>number of weft threads in 1 centimetre</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 1, (XPath TEXCatalog/TCbody/TCgroup/TCitem/construction/weftEndsN) 0-1</p>
width	<p>effective width of a specified object</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2, (XPath TEXCatalog/TCheader/picture/width) 0-1 - note: the 'um' attribute of this element must be 'E37' (pixel) (XPath TEXCatalog/TCbody/TCgroup/picture/width) 0-1 - note: the 'um' attribute of this element must be 'E37' (pixel) (XPath TEXCatalog/TCbody/TCgroup/TCitem/picture/width) 0-1 - note: the 'um' attribute of this element must be 'E37' (pixel)</p>

2.3 Suggested best practices

TEXCatalog/TCbody/TCgroup/TCitem/marketPrice/

geographicArea/geographicAreaText (text identifying a geographic area)

using a code (geographicAreaCode) is preferable when the area coincides with a state

2.4 Enumeration tables

List of enumeration tables used in the XML document. You can find the corresponding codes at:
<http://www.ebiz-tcf.eu/moda-ml/imple/moda-ml-draft.asp?lingua=en&pag=6>

NT100 - eBIZ TCFUpstream version
NT11 - transport causal
NT16 - VAT rate or code
NT18 - message function
NT2 - third party qualifier
NT29 - format of a date
NT3 - data format
NT4 - end use
NT43 - operational code qualifier
NT6 - coding system owner/issuer
NT7 - unit of measure
NT71 - picture resolution type
NT72 - picture final use type
T1 - terms of payment
T10 - ISO3166 - Country
T15 - dye/print process type
T16 - dyestuff type
T17 - weave type
T19 - fibre type
T2 - Modes of payment
T21 - type of document
T3 - terms of delivery
T38 - transport conditions
T4 - fabric piece inner packing (wrapping) 1
T40 - type of transport means
T41 - type of Allowance or Charge
T44 - additional code type
T5 - fabric piece inner packing (wrapping) 2
T6 - fabric piece outer packing
T61 - duty or tax or fee type
T62 - duty or tax or fee category
T8 - Modes of Transport
T9 - ISO4217 - Currency

ACKNOWLEDGEMENT



This action is part of the eBIZ-4.0 project, which has received funding from the European Union's COSME Programme (2014 - 2020).


DISCLAIMER

The content of this document represents the views of the authors only and is their sole responsibility; it cannot be considered to reflect the views of the European Commission and/or the Executive Agency for Small and Medium-sized Enterprises (EASME) or any other body of the European Union.


The European Commission and the Agency do not accept any responsibility for use that may be made of the information it contains.



Annex A




Representative images of the principal complex elements' structure.

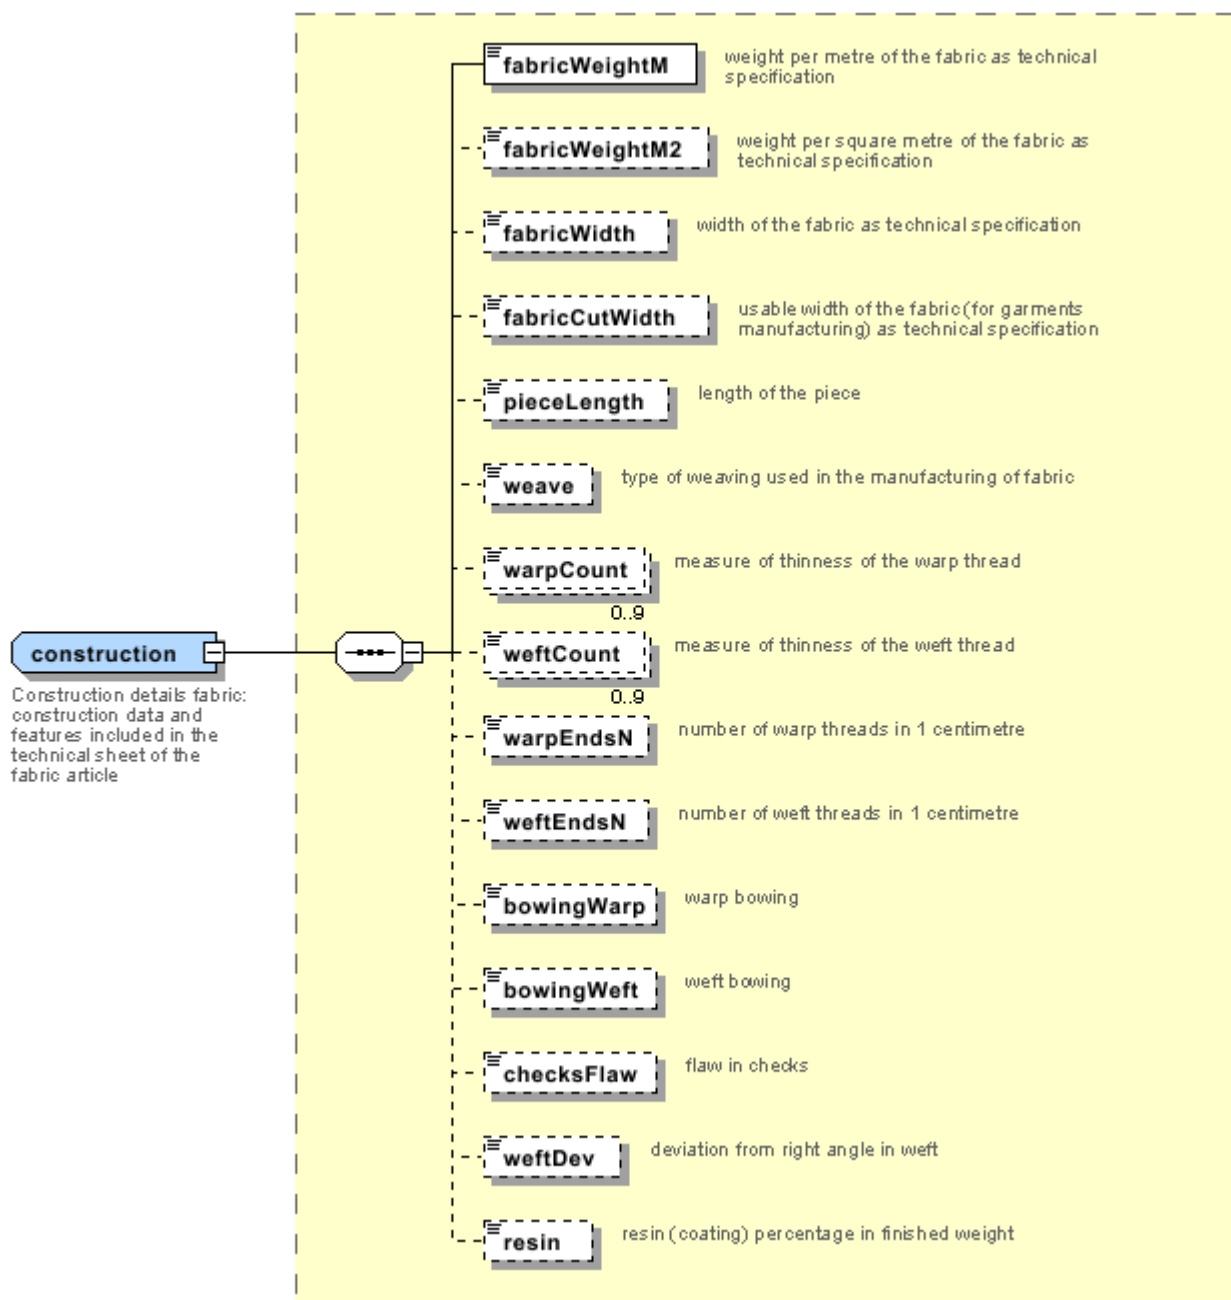


generalChar
 General characteristics
 fabric: general data
 included in the technical
 sheet of the fabric article



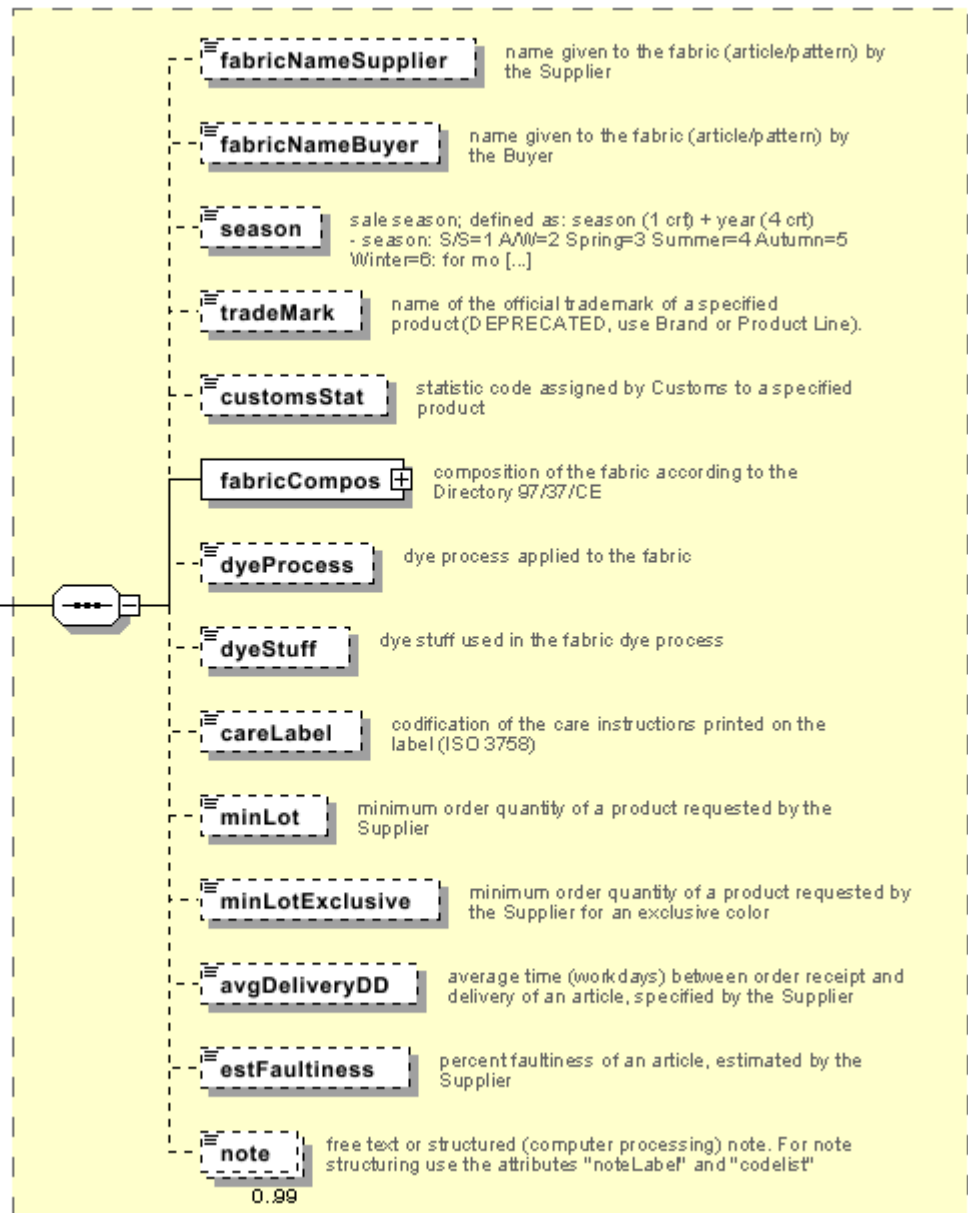


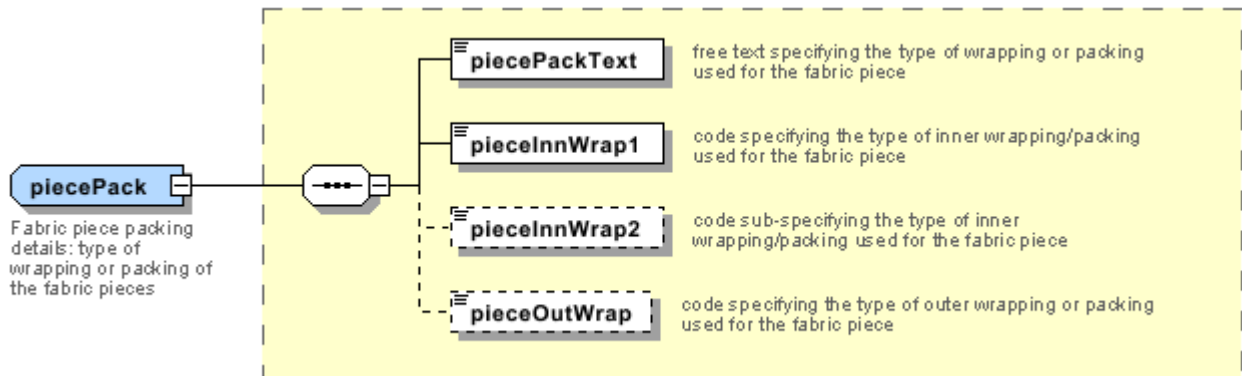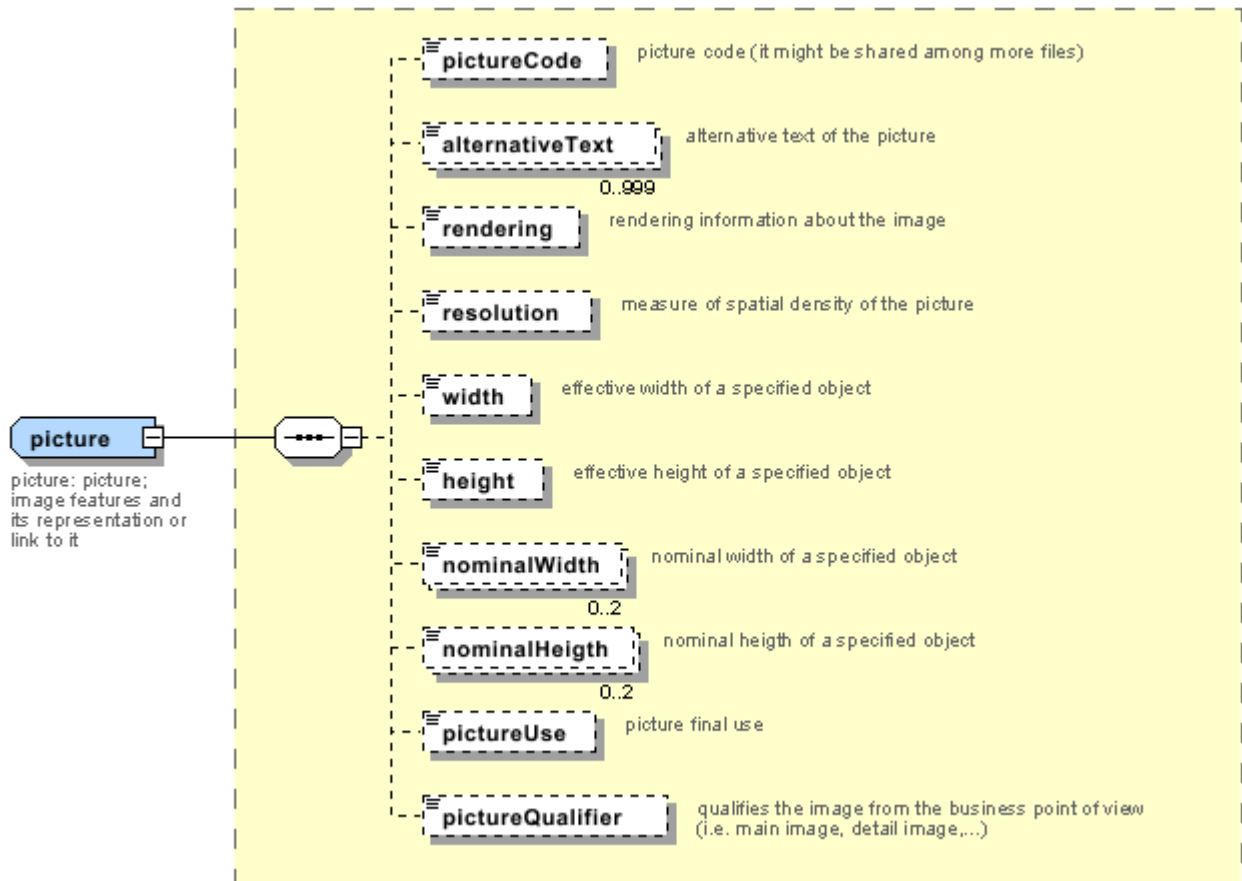

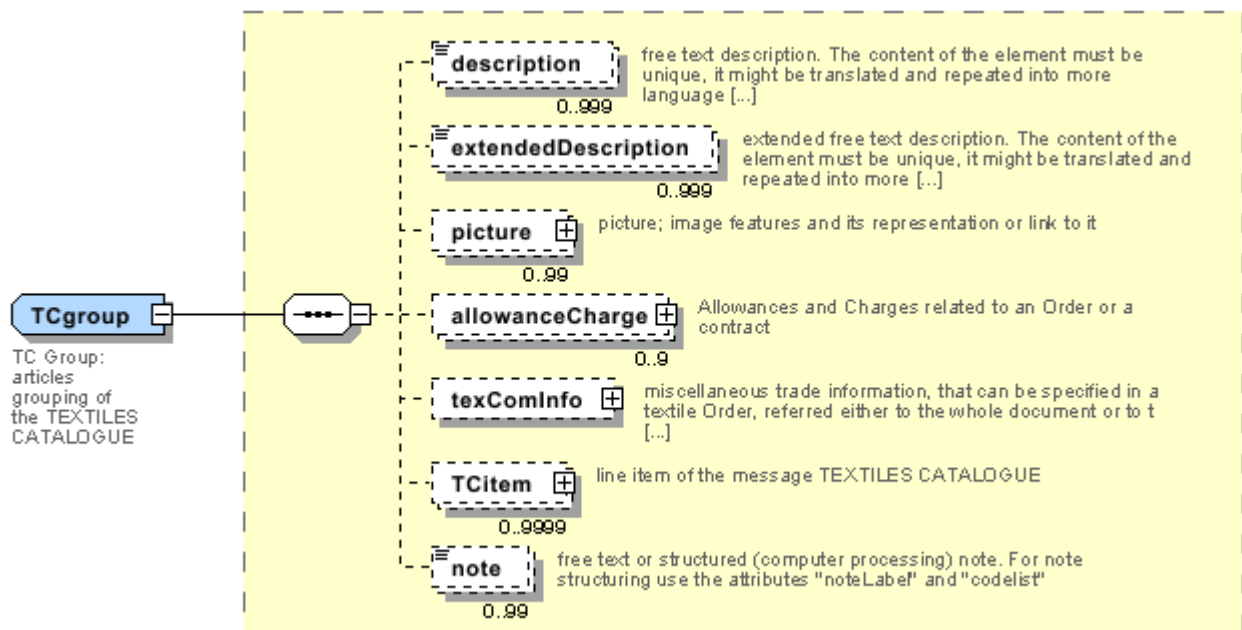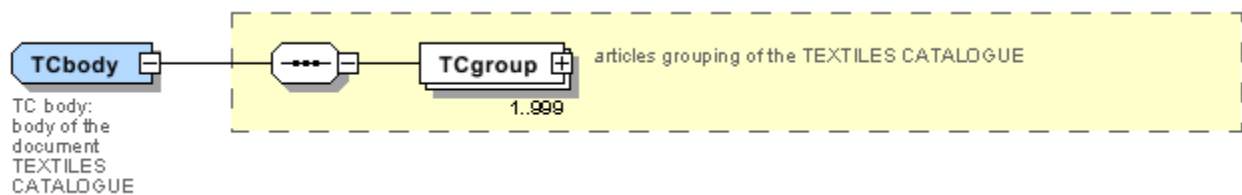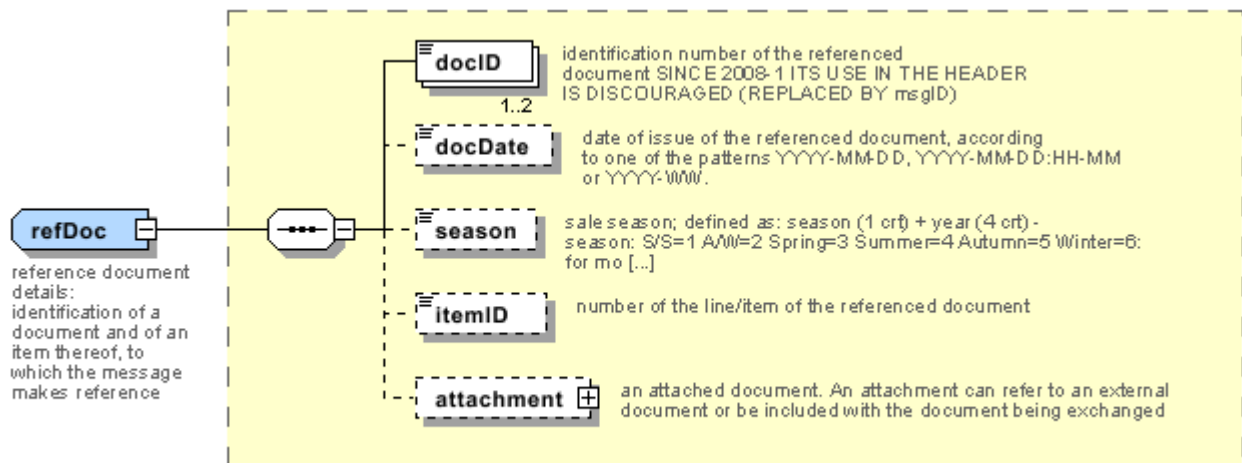

TChheader
 TC header:
 header of the
 document
 TEXTILES
 CATALOGUE

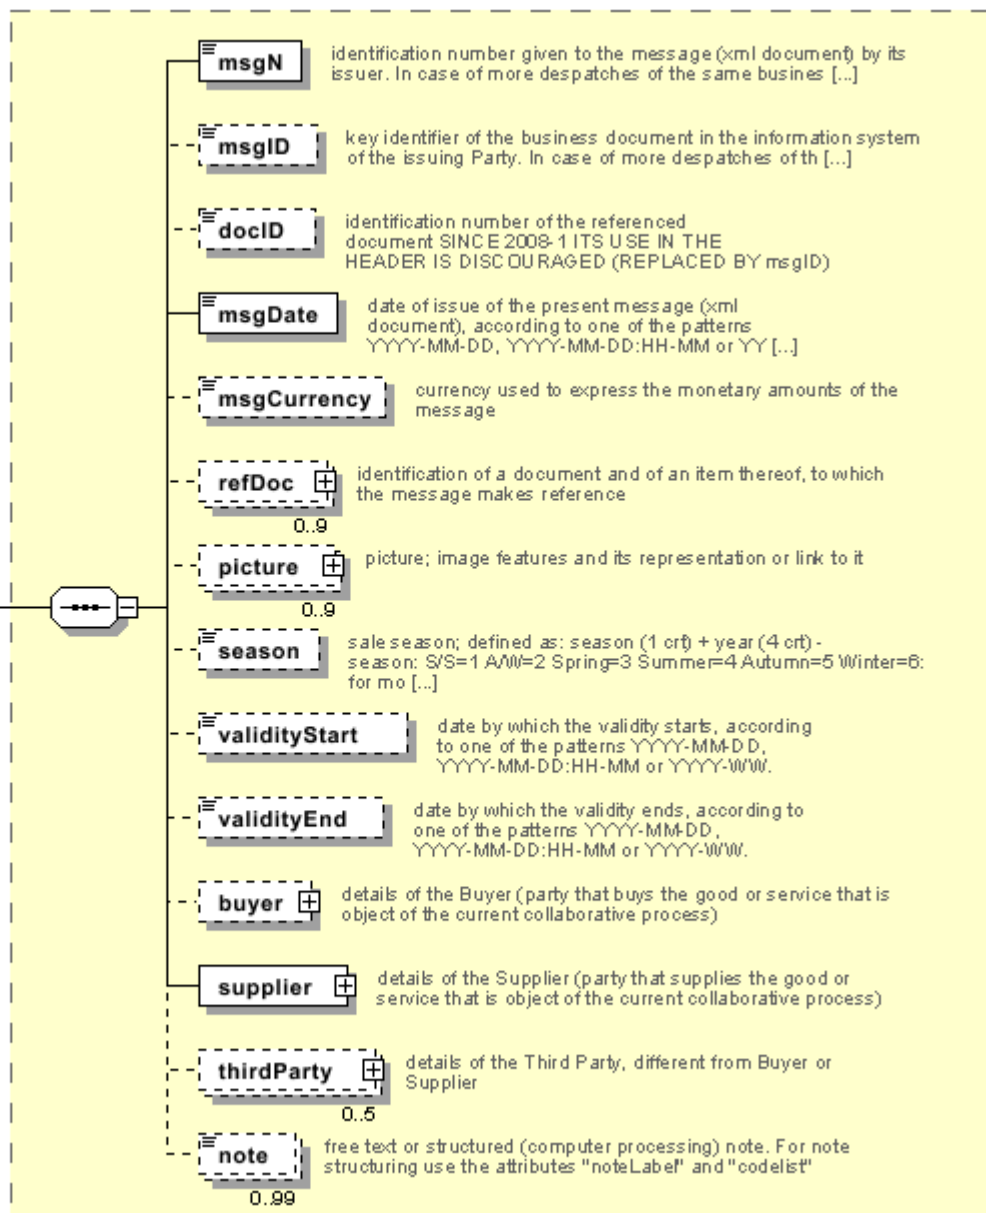

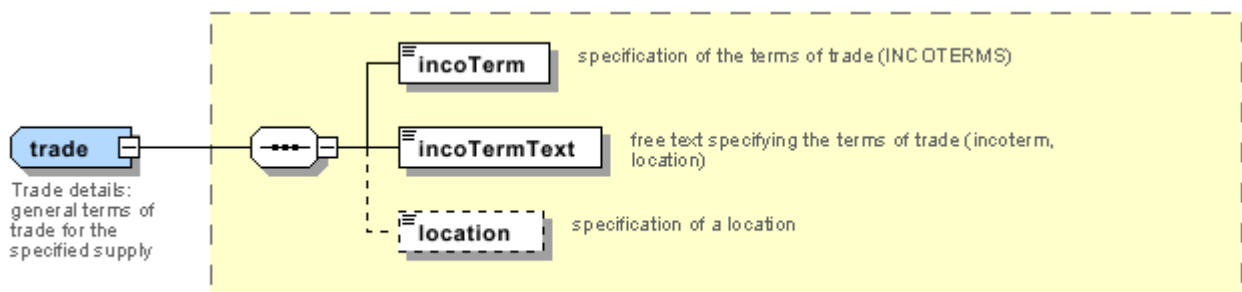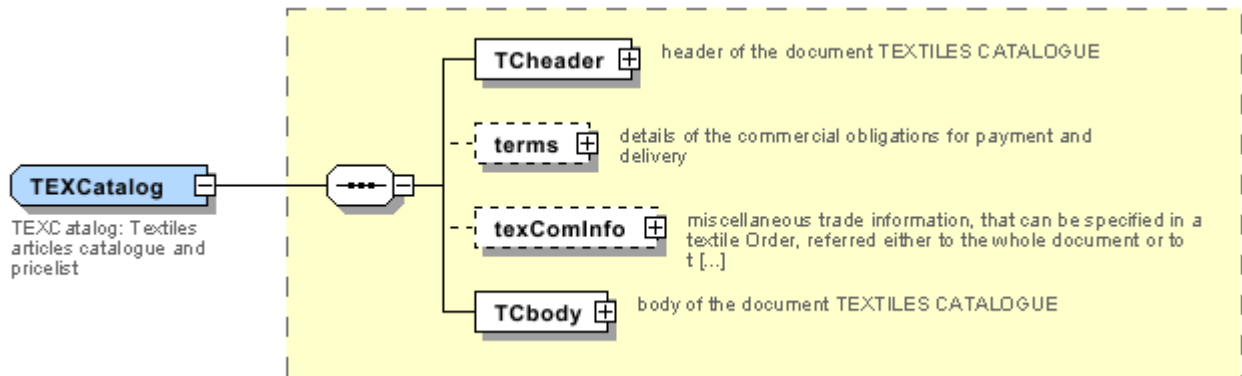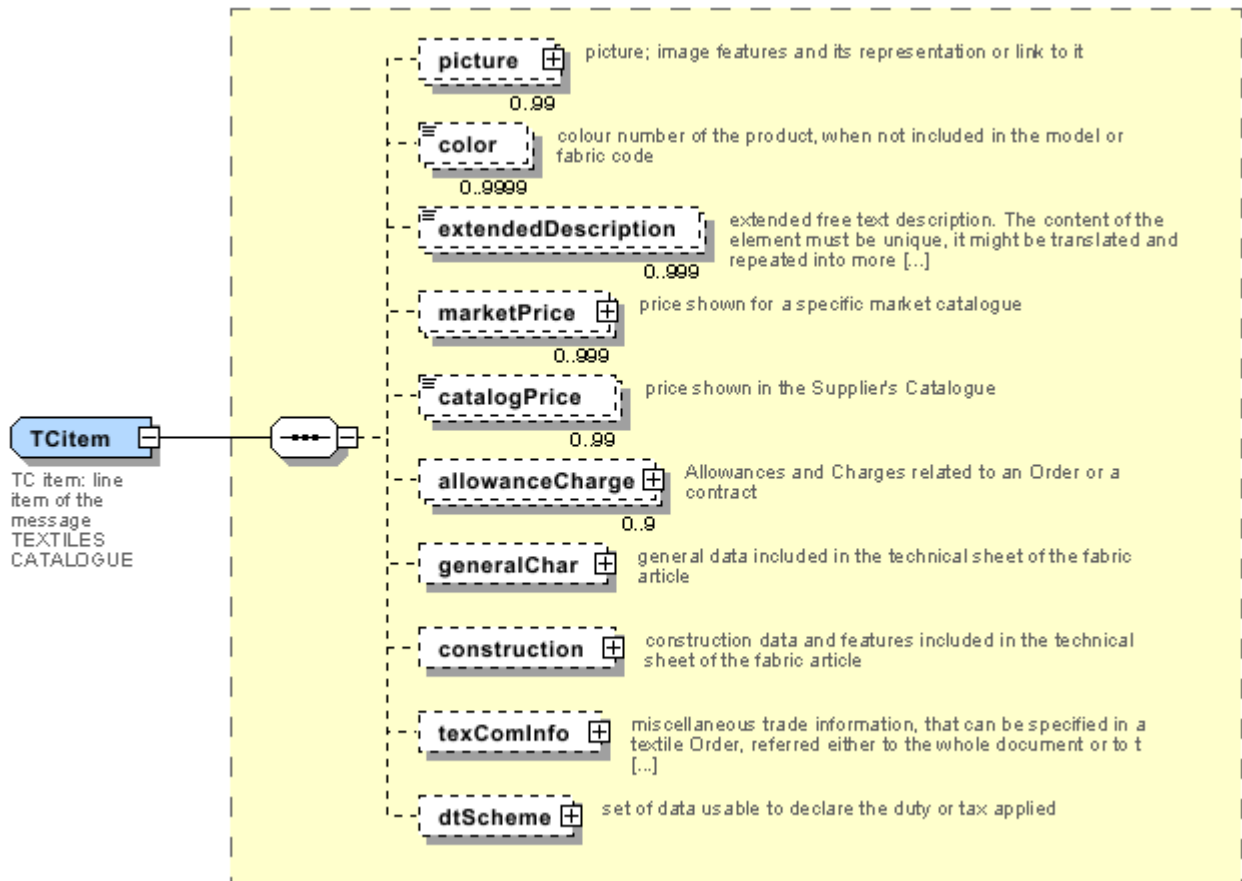

Annex B

NT100 - eBIZ TCFUpstream version

dictionary version

Agency name: eBIZ

tabella cod.: NT100

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT100.xml

Code	Description	Adoption note	Date of insertion
2013-1	v2013-1		01/07/2013
2018-1	v2018-1		04/11/2018
draft	draft		08/09/2017

NT11 - transport causal

reason for the transport

Agency name: eBIZ

tabella cod.: NT11

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT11.xml

Code	Description	Adoption note	Date of insertion
FOC	free of charge		
FRW	return from re-works		
FST	return from storage		
FWW	return from view		
FWK	return from works		
IST	in storage		
NWK	return non-worked		
RJC	return from rejection		
SEL	to sell		
STO	to storage		
VEW	to view		
WRK	to works		

NT16 - VAT rate or code

VAT rate or code (DEPRECATED, use dtScheme element)

tabella cod.: NT16

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT16.xml

NT18 - message function

function performed by the present message with regards to the transmission

Agency name: eBIZ

tabella cod.: NT18

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT18.xml

Code	Description	Adoption note	Date of insertion
CA	delete this document		01/07/2013
CP	copy		
OR	original		
RC	re-transmission for data correction		
RT	re-transmission		

NT2 - third party qualifier

Third Party role qualifier

Agency name: eBIZ

tabella cod.: NT2

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT2.xml

Code	Description	Adoption note	Date of insertion
AG	Sales Agent		
CO	Quality Controller		
DC	Response to		
DF	Invoicee		
DI	Copy to (CC)		28/10/2014
DM	Consignee		
DP	Consignment address (Delivery Party)		
IM	Importer		
OR	Originator		10/09/2014
SP	Forwarder		

TX	Tax Representative		
----	--------------------	--	--

NT29 - format of a date

format used for the date

Agency name: eBIZ

tabella cod.: NT29

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT29.xml

Code	Description	Adoption note	Date of insertion
D	YYYY-MM-DD		
M	YYYY-MM-DD:HH-MM		
W	YYYY-WW		

NT3 - data format

format of a string according to a customized User rule (local rule)

Agency name: eBIZ

tabella cod.: NT3

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT3.xml

Code	Description	Adoption note	Date of insertion
EN4	GS1-GLN		01/07/2013
MD	mutually agreed		

NT4 - end use

specifies the final use of the product

Agency name: eBIZ

tabella cod.: NT4

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT4.xml

Code	Description	Adoption note	Date of insertion
PC	test piece		
PR	production		
SA	Sample		10/09/2014

SC	samples card		
TI	patch		
TP	(test cut)		

NT43 - operational code qualifier

Agency name: eBIZ

tabella cod.: NT43

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT43.xml

Code	Description	Adoption note	Date of insertion
1	event		08/09/2017
2	sales channel		08/09/2017
3	goods management type		08/09/2017
4	special initiative		08/09/2017

NT6 - coding system owner/issuer

code specifying the organisation who has created or owns the coding or numbering system

Agency name: eBIZ

tabella cod.: NT6

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT6.xml

Code	Description	Adoption note	Date of insertion
CL	Customer/buyer		
CO	Quality Controller		
EN	GS1 (ex-EAN International)		
ES	e-Stockflow		
FO	Supplier		
GS	GS1		01/07/2013
MF	VAT identifier		
ML	Moda-ML		
SP	Service Provider		

NT7 - unit of measure

specification of the unit of measure, it is a sub set of table Unit of Measure Code - UN/ECE REC 20 delivered by United Nations Economic Commission for Europe (UN/ECE)

Agency name: eBIZ / UN/ECE

tabella cod.: NT7

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT7.xml

Other link: <http://docs.oasis-open.org/ubl/os-UBL-2.1/cl/gc/default/UnitOfMeasureCode-2.1.gc#>

Code	Description	Adoption note	Date of insertion
CMK	square centimetre		20/12/2017
CMQ	cubic centimetre		20/12/2017
CMT	centimetre		
CNE	centiNewton		
CO2TON	ton of CO2		10/09/2014
COUPLES	couples		
DMQ	cubic decimetre		
E37	pixel		11/04/2018
GRM	gram		
HUR	hour		
INH	inch		
KGM	kilogram		
KMT	kilometer		
KWH	kilowatthours		10/09/2014
LBR	pound		
MIN	minute		
MMK	centimetre		20/12/2017
MMK	square millimetre		20/12/2017
MTK	square metre		20/12/2017
MTQ	cubic metre		
MTR	metre		
NMB	numero		
ONZ	ounce		
P1	percent		
PPM	parts per milion		
PZ	piece		
RPM	rounds per metre		
YRD	yard		

NT71 - picture resolution type

the type of density of the picture

Agency name: eBIZ

tabella cod.: NT71

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT71.xml

Code	Description	Adoption note	Date of insertion
dpi	dots per inch		11/04/2018
ppi	pixels per inch		11/04/2018

NT72 - picture final use type

the type of final use of the picture

Agency name: eBIZ

tabella cod.: NT72

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT72.xml

Code	Description	Adoption note	Date of insertion
ICO	online icon		11/04/2018
IMG	generic online image		11/04/2018
IML	online image large		11/04/2018
IMM	online image medium		11/04/2018
IMS	online image small		11/04/2018
PRH	high quality printing		11/04/2018
PRN	printing		11/04/2018

T1 - terms of payment

code specifying the terms or time by which the payment must be done

Agency name: eBIZ

tabella cod.: T1

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T1.xml

Code	Description	Adoption note	Date of insertion
------	-------------	---------------	-------------------

ANTICIP	PAYMENT IN ADVANCE		
BLCOLLECT/120D	BILL OF LADING 120 DD		
BLCOLLECT/30D	BILL OF LADING 30 DD		
BLCOLLECT/60D	BILL OF LADING 60 DD		
BLCOLLECT/90D	BILL OF LADING 90 DD		
CASH	PAYMENT ON DELIVERY		
CASHINV	PAYMENT ON RECEIPT OF INVOICE		
CREDOC/0D	DOCUMENTARY CREDIT FOR PAYM. AT SIGHT		
CREDOC/120	DOCUMENTARY CREDIT FOR PAYM. AT 120 DD		
CREDOC/150	DOCUMENTARY CREDIT FOR PAYM. AT 150 DD		
CREDOC/180	DOCUMENTARY CREDIT FOR PAYM. AT 180 DD		
CREDOC/30D	DOCUMENTARY CREDIT FOR PAYM. AT 30 DD		
CREDOC/45D	DOCUMENTARY CREDIT FOR PAYM. AT 45 DD		
CREDOC/60	DOCUMENTARY CREDIT FOR PAYM. AT 60 DD		
CREDOC/90	DOCUMENTARY CREDIT FOR PAYM. AT 90 DD		
DEL/10	PAYMENT AT 10 DD AFTER DELIVERY		
DOCOLLECT/120D	DOCUMENTARY COLLECTION AT 120 DD		
DOCOLLECT/30D	DOCUMENTARY COLLECTION AT 30 DD		
DOCOLLECT/60D	DOCUMENTARY COLLECTION AT 60 DD		
DOCOLLECT/90D	DOCUMENTARY COLLECTION AT 90 DD		
INV/120D	PAYMENT AT 120 DD AFTER RECEIPT OF INVOICE		
INV/150D	PAYMENT AT 150 DD AFTER RECEIPT OF INVOICE		
INV/180D	PAYMENT AT 180 DD AFTER RECEIPT OF INVOICE		
INV/30D	PAYMENT AT 30 DD AFTER RECEIPT OF INVOICE		
INV/45D	PAYMENT AT 45 DD AFTER RECEIPT OF INVOICE		
INV/60D	PAYMENT AT 60 DD AFTER RECEIPT OF INVOICE		
INV/90D	PAYMENT AT 90 DD AFTER RECEIPT OF INVOICE		
INVULTIMO	PAYMENT AT END MONTH RECEIPT INVOICE		
INVULTIMO/10D	PAYMENT 10 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/120D	PAYMENT 120 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/150D	PAYMENT 150 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/180D	PAYMENT 180 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/240D	PAYMENT 240 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/30D	PAYMENT 30 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/45D	PAYMENT 45 DD AFTER END MONTH RECEIPT INVOICE		

INVULTIMO/60D	PAYMENT 60 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/90D	PAYMENT 90 DD AFTER END MONTH RECEIPT INVOICE		
NOPAY	WITHOUT PAYMENT		
RECREDOC/0D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT SIGHT		
RECREDOC/120D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 120 DD		
RECREDOC/150D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 150 DD		
RECREDOC/180D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 180 DD		
RECREDOC/30D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 30 DD		
RECREDOC/45D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 45 DD		
RECREDOC/60D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 60 DD		
RECREDOC/90D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 90 DD		
ULTIMO	PAYMENT BY END MONTH OF DELIVERY		
ULTIMO/10	PAYMENT AT 10 DD AFTER END MONTH OF DELIVERY		

T10 - ISO3166 - Country

code of the nation

Agency name: ISO

tabella cod.: T10

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml

Table not printed: there are 239 elements, more than the maximum specified for printing: 99.

T15 - dye/print process type

dye process applied to the fabric

Agency name: eBIZ

tabella cod.: T15

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T15.xml

Code	Description	Adoption note	Date of insertion
CP	cylinder printing		
DP	discharge printing		
FI	fibre dyed - spun dyed		
PC	piece dyed		
PR	printing		

SP	screen printing		
TP	top dyed		01/07/2013
YR	yarn dyed		

T16 - dyestuff type

dye stuff used in the fabric dye process

Agency name: eBIZ

tabella cod.: T16

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T16.xml

Code	Description	Adoption note	Date of insertion
AC	chrome acid dyestuff		
AN	acid dyestuff		
CA	basic dyestuff		
DI	direct dyestuff		
DS	disperse dyestuff		
NP	naphtol dyestuff		
PI	pigment		01/07/2013
PM	premetallized dyestuff		
RE	reactive dyestuff		
SU	sulfur		01/07/2013

T17 - weave type

type of weaving used in the manufacturing of fabric

Agency name: eBIZ

tabella cod.: T17

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T17.xml

Code	Description	Adoption note	Date of insertion
BA	2/2 twill weave		
BE	birdseye weave		
CO	corduroy weave		
DE	derived weave		
DO	double weave		

GA	gauze		
GR	granite weave		
HO	honeycomb weave		
HS	hopsack weave		
MA	mat weave		
PL	plain weave		
SA	satin weave		
TO	towel weave		
TR	tricot weave		
TW	twill weave		
V	V-weave		
W	W-weave		

T19 - fibre type

type of fibre used in a textile product

Agency name: eBIZ

tabella cod.: T19

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T19.xml

Code	Description	Adoption note	Date of insertion
AB	abaca		20/08/2018
AC	acetate		
AF	other fibres		
AG	alginic fibre		
AL	alfa		20/08/2018
CA	hemp		
CC	coir (coconut)		20/08/2018
CL	chlorofibre		
CO	cotton		
CU	cuprous		
EA	elastan		
EL	Elastodiene		20/08/2018
FL	fluorofibre		
GI	broom		20/08/2018
GL	textile glass		

HA	hair		20/08/2018
HE	henequen		20/08/2018
HL	mixed linen		
HL	cotton linen union		20/08/2018
JU	jute		
KE	kenaf		20/08/2018
KP	kapoc		20/08/2018
LI	linen		
LY	lyocell		20/08/2018
MA	modacrylic		
MD	modal		
ME	metallized		
MG	maguey		20/08/2018
PA	polyamide		
PB	polyureic		
PC	acrylic		
PE	polyethylene		
PI	paper		20/08/2018
PL	polyester		
PM	polyimide		
PP	polypropylene		
PR	proteic		
PU	polyurethane		
RA	mamie		20/08/2018
SE	silk		
SI	sisal		20/08/2018
SN	sun		20/08/2018
TA	triacetate		
TR	textile residues or unspecified composition		20/08/2018
TV	trivinyll		
VI	viscose		
VY	vinylal		
WA	angora		
WB	beaver		20/08/2018
WC	cashgora		

WG	vicuna		
WK	camel		
WL	llama		
WM	mohair		
WN	lapin		20/08/2018
WO	wool		
WP	alpaca		
WS	cashmere		
WT	Oteer		20/08/2018
WU	guanaco		
WV	virgin wool		
WY	yack		

T2 - Modes of payment

way or means of payment

Agency name: eBIZ

tabella cod.: T2

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T2.xml

Code	Description	Adoption note	Date of insertion
BB	bank transfer		
IA	collection through Agent		
IS	collection through Forwarder		
RB	bank receipt		
RD	remittance		
SW	bank SWIFT		
TR	bank draft		

T21 - type of document

type or class to which the referenced document belongs

Agency name: eBIZ

tabella cod.: T21

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T21.xml

Code	Description	Adoption note	Date of insertion
BOR	blanket order		01/02/2018
CAT	Price catalogue - tech sheet		
CEO	Certificate of origin		13/04/2018
CER	Certificate		13/04/2018
COC	colour card		
CRN	Credit note		08/09/2017
CTO	Checking order		01/07/2013
CTR	Contract		
CXF	CxF3 file		01/07/2013
DAD	Darn order		
DDT	ddt		
DEA	Despatch advise		
DER	Despatch request		
DR	Document Request		02/12/2014
FOR	Forecast		02/12/2014
GSO	Garment stock offer		
GSX	Garment stock offer change		
INV	Invoice		
KCC	Knitting-Clothing Commission Order		02/12/2014
KCI	Garment in Work Inventory Report		02/12/2014
M2M	Made to Measure Production Order		02/12/2014
MAS	Master marker		
MCI	Visual merchandising instruction		13/04/2018
OCH	Order change		
OFF	Offer		
ORD	Purchase order		
ORP	Order response		
OSR	order status request		
OSS	Offer status		02/12/2014
OST	Order status		
OUR	our reference		
QR	Quality Report		02/12/2014
RAI	Raw Material in Work Inventory Report		02/12/2014
RDC	Raw dyeing commission order		

RDH	Raw dyeing order change		
RDR	Raw dyeing order response		
REA	Receiving advise		
REQ	Request for Offer		
RET	Return		02/12/2014
RSC	Spinning commission order		
RSH	Spinning order change		
RSR	Spinning order response		
SCL	process sheet		
TFC	Textile dyeing-finishing commission order		
TFX	Textile Dyeing-Finishing Order Change		02/12/2014
TPC	Textile printing commission order		
TPX	Textile Printing Order Change		02/12/2014
TWI	Textile in work inventory		
VMI	visual merchandising instructions		01/02/2018
WAC	Warping commission order		
WEC	Weaving commission order		
YDC	Yarn dyeing commission order		
YDH	Yarn dyeing order change		
YDR	Yarn dyeing order response		
YTC	Twisting commission order		
YWI	Yarn in work inventory		

T3 - terms of delivery

specification of the terms of trade (INCOTERMS)

Agency name: Incoterms

tabella cod.: T3

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T3.xml

Code	Description	Adoption note	Date of insertion
CFR	COST AND FREIGHT (named port of destination)		
CIF	COST, INSURANCE AND FREIGHT (named port of destination)		
CIP	CARRIAGE AND INSURANCE PAID (named place of destination)		

CP T	CARRIAGE PAID (named place of destination)		
DA F	DELIVERED AT FRONTIER (named place)	according to Incoterms® 2010 it is obsolete	08/12/2017
DA P	Delivered at Place of destination (named place of destination)	according to Incoterms® 2010	08/12/2017
DA T	Delivered at Terminal (named place of destination)	according to Incoterms® 2010	08/12/2017
DD P	DELIVERED DUTY PAID (named place of destination)		
DD U	DELIVERED DUTY UNPAID (named place of destination)	according to Incoterms® 2010 it is obsolete, use DAP	08/12/2017
DE Q	DELIVERED EX-QUAY (named port of destination)	according to Incoterms® 2010 it is obsolete	08/12/2017
DE S	DELIVERED EX-SHIP (named port of destination)	according to Incoterms® 2010 it is obsolete	08/12/2017
EX W	EX WORKS (named place)		
FA S	FREE ALONGSIDE SHIP (named port of shipment)		
FC A	FREE CARRIER (named place)		
FO B	FREE ON BOARD (named port of shipment)		

T38 - transport conditions

special condition of transport or special service requested to the Forwarder

tabella cod.: T38

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T38.xml

Code	Description	Adoption note	Date of insertion
ACC	arrange customs clearance		
CAL	Carrier loads		
CAU	Carrier unloads		
CMR	CMR carnet		
FFN	freight forwarders national conditions		
FLD	special agreement for full loading		
NCC	do not arrange customs clearance		
PPB	packaging paid by Buyer		
PPS	packaging paid by Supplier		

PRO	proof of delivery		
RFR	return container free		
RPC	return container paid by Customer		
RPS	return container paid by Supplier		
SHL	Shipper loads		
SHU	Consignee unloads		

T4 - fabric piece inner packing (wrapping) 1

code specifying the type of inner wrapping/packing used for the fabric piece

Agency name: eBIZ

tabella cod.: T4

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T4.xml

Code	Description	Adoption note	Date of insertion
A	Folded, whole width		
B	Folded, doubled		
C	Folded, tube products		
D	Spoiled, whole width		
E	Spoiled, doubled, pli: left		
F	Spoiled, doubled, pli: right		
G	Rolled, whole width, single item		
H	Rolled, whole width, several items		
I	Rolled, doubled		
J	Rolled, tube products		

T40 - type of transport means

means of transport, in general or referred to a specific leg

Agency name: eBIZ

tabella cod.: T40

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T40.xml

Code	Description	Adoption note	Date of insertion
AIR	aircraft		
SHP	ship		

TRU	truck		
VAN	van		

T41 - type of Allowance or Charge

coded specification of an Allowance or Charge (elaborated from UNECE 4465)

Agency name: eBIZ

tabella cod.: T41

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T41.xml

Code	Description	Adoption note	Date of insertion
1	Agreed settlement		19/08/2018
10	Costs for draft		19/08/2018
11	Bank charges	DEPRECATED, use C BK	19/08/2018
12	Agent commission		19/08/2018
14	Wrong delivery		19/08/2018
15	Goods returned to agent		19/08/2018
16	Goods partly returned		19/08/2018
17	Transport damage		19/08/2018
19	Trade discount		19/08/2018
2	Below specification goods		19/08/2018
20	Deduction for late delivery	DEPRECATED, use C WB	19/08/2018
21	Advertising costs		19/08/2018
22	Customs duties		19/08/2018
23	Telephone and postal costs		19/08/2018
24	Repair costs		19/08/2018

25	Attorney fees		19/08/2018
26	Taxes		19/08/2018
3	Damaged goods		19/08/2018
30	Direct payment to seller		19/08/2018
32	Goods not delivered		19/08/2018
33	Late delivery		19/08/2018
35	Goods returned		19/08/2018
36	Invoice not received		19/08/2018
37	Credit note to debtor/not to us		19/08/2018
38	Deducted bonus		19/08/2018
39	Deducted discount		19/08/2018
4	Short delivery		19/08/2018
40	Deducted freight costs		19/08/2018
41	Deduction against other invoices		19/08/2018
42	Credit balance(s)		19/08/2018
45	Debit note to seller		19/08/2018
46	Discount beyond terms		19/08/2018
48	Allowance/charge error		19/08/2018
49	Substitute product		19/08/2018
50	Terms of sale error		19/08/2018
52	Wrong invoice		19/08/2018
53	Duplicate invoice		19/08/2018

54	Weight error		19/08/2018
55	Additional charge not authorized		19/08/2018
56	Incorrect discount		19/08/2018
57	Price change		19/08/2018
58	Variation		19/08/2018
59	Chargeback		19/08/2018
65	Settlement to agent		19/08/2018
66	Cash discount		19/08/2018
7	Payment on account		19/08/2018
70	Wrong monetary amount resulting from incorrect free goods quantity		19/08/2018
72	Temporary special promotion		19/08/2018
73	Difference in tax rate		19/08/2018
74	Quantity discount		19/08/2018
75	Promotion discount		19/08/2018
76	Cancellation deadline passed		19/08/2018
77	Pricing discount		19/08/2018
78	Volume discount		19/08/2018
79	Sundry discount		19/08/2018
8	Returnable container charge included		19/08/2018
9	Invoice error		19/08/2018
AW A	bonus for works ahead of schedule		
CBK	bank charges		
CCR	servizio di corriere		

CIN	insurance		
CLB	labelling		
CPK	packing		
CSP	special packing		
CW B	penalty for works behind schedule		

T44 - additional code type

qualifier of the additional coding of a product

Agency name: eBIZ

tabella cod.: T44

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T44.xml

Code	Description	Adoption note	Date of insertion
CC	colour card		
CL	sales collection		
CO	company identification code		08/09/2017
DY	dye number		
LT	lot number		
MDI	Made in		08/09/2017
MS	manufacturing state		
PKG	packaging		09/09/2014
PL	product line		
RGB	RGB value		
SE	selvedge code		

T5 - fabric piece inner packing (wrapping) 2

code specifying the sub-type of inner wrapping/packing used for the fabric piece

Agency name: eBIZ

tabella cod.: T5

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T5.xml

Code	Description	Adoption note	Date of insertion
A	Open		

B	Folded once, not looped		
C	Folded twice, not looped		
H	Folded once, looped		
I	Folded twice, looped		
J	Without inner object, right side inside		
K	On carton or spooling plank, right side inside		
L	On spool (for pressure sensitive products), right side inside		
M	Without inner object, left side inside		
N	On carton or spooling plank, left side inside		
O	On spool (for pressure sensitive products), left side inside		
P	Without inner object, right side inside (deprecated code)		
Q	On carton, right side inside		
R	On wooden stick, right side inside		
S	Without inner object, left side inside (deprecated code)		
T	On carton, left side inside		
U	On wooden stick, left side inside		

T6 - fabric piece outer packing

code specifying the type of outer wrapping or packing used for the fabric piece

Agency name: eBIZ

tabella cod.: T6

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T6.xml

Code	Description	Adoption note	Date of insertion
0	Not wrapped		
1	Totally wrapped		
2	Wrapped, one side open		
3	Wrapped, both sides open		
4	Wrapped, one side open, with show corner		
5	Wrapped in cartons		
6	Double wrapped		

T61 - duty or tax or fee type

duty or tax or fee type

Agency name: eBIZ

tabella cod.: T61

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T61.xml

Code	Description	Adoption note	Date of insertion
BOL	stamp duty		01/07/2013
CUD	customs duty		01/07/2013
ENV	environmental tax		01/07/2013
FRE	no tax		01/07/2013
OTH	other tax charges		01/07/2013
VAT	value added tax		01/07/2013

T62 - duty or tax or fee category

duty or tax or fee category

Agency name: eBIZ

tabella cod.: T62

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T62.xml

Code	Description	Adoption note	Date of insertion
AA	lower than standard rate		01/07/2013
E	tax not applicable		01/07/2013
H	higher than standard rate		01/07/2013
O	outside scope of tax		01/07/2013
S	standard rate		01/07/2013
Z	zero rate goods		01/07/2013

T8 - Modes of Transport

way of transport, in general or referred to the specified leg

Agency name: eBIZ

tabella cod.: T8

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T8.xml

Code	Description	Adoption note	Date of insertion
1	MARITIME TRANSPORT		

10	Courier		01/07/2013
2	RAIL TRANSPORT		
3	ROAD TRANSPORT		
4	AIR TRANSPORT		
5	MAIL		
6	AIR + SHIP TRANSPORT		
8	INLAND WATER TRANSPORT		
9	MODE UNKNOWN		

T9 - ISO4217 - Currency

currency code

Agency name: ISO

tabella cod.: T9

File codes list (Generic code): http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml

Table not printed: there are 205 elements, more than the maximum specified for printing: 99.